arXiv:1011.6639v1 [cs.IT] 30 Nov 2010

Multiple Access Channels with States Causally Known at Transmitters

Min Li[1], Osvaldo Simeone[2] and Aylin Yener[1]

[1]Dept. of Electrical Engineering, The Pennsylvania State University, University Park, PA 16802
[2]Dept. of Electrical and Computer Engineering, New Jersey Institute of Technology, University Heights, NJ 07102
mxl971@psu.edu, osvaldo.simeone@njit.edu, yener@ee.psu.edu

November 29, 2010

Abstract

The state-dependent multiple access channel (MAC) is considered where the state sequences are known causally to the encoders. First, a MAC with two independent states each known causally to one encoder is revisited, and a new achievable scheme inspired by the recently proposed noisy network coding is presented. This scheme is shown to achieve a rate region that is potentially larger than that provided by recent work for the same model. Next, capacity results are presented for a class of channels that include modulo-additive state-dependent MACs. It is shown that the proposed scheme can be easily extended to an arbitrary number of users. Next, a similar scheme is proposed for a MAC with common state known causally to all encoders. The corresponding achievable rate region is shown to reduce to the one given in the previous work as a special case for two users. Finally, output feedback is introduced in the model at hand with independent states and an example is provided to show the advantage of feedback in enlarging the capacity region.

The work of M. Li and A. Yener was supported in part by the National Science Foundation under Grants CNS 0716325, CCF 0964362 and DARPA ITMANET Program under Grant W911NF-07-1-0028. The work of O. Simeone was supported in part by the National Science Foundation under Grant CCF 0914899.

I. INTRODUCTION

State-dependent channels model relevant phenomena in wireless communication links, such as fading and interference. A usual model is that there exists a state sequence $s^n = (s_1, s_2, ..., s_n)$ with s_i, $i = 1, 2, ..., n$, denoting the state value affecting the channel at time instant i. Understanding the merit of state information, i.e., information about the sequence s^n, for reliable communication is a key problem of both theoretical and practical interest. State-dependent channels are mainly classified into three groups with respect to the availability of state information at the encoders: (i) non-causal state information where the encoders know the entire state sequence s^n before encoding for the current block; (ii) causal state information where at channel use i, the encoders know all states up to and including at i; (iii) strictly casual state information where at channel use i the encoders know a delayed version of state. Here we shall consider setting (iii) which is most realistic. We focus on models where the decoders do not have channel state information. As an example, in a cognitive radio setup [1]–[3], when the state models the interference from other users, cognitive transmitters, capable of sensing their environment, can be cognizant of the interference in a causal fashion, while the corresponding receivers are not able to measure the interference.

In a point-to-point discrete memoryless channel (DMC), Shannon [4] has show that strictly causal feedback of the received symbols from receiver to transmitter, i.e., output feedback, does not increase the capacity. It can be shown that strictly causal state information at the encoder has the same effect for a memoryless state-dependent channel with independently and identically distributed (i.i.d.) state sequence s^n. On the contrary, causal and non-causal state information turns out to be useful for point-to-point memoryless channels and capacity-achieving strategies have been derived for the former [5] and the latter [6], [7].

State-dependent multi-user channels have also been investigated, see [8] and references therein. In particular, we summarize existing results on state-dependent multiple access channels (MAC), which are the focus of our work. Reference [9] derived single-letter inner and outer bounds on the capacity region for two-user MACs with causal state information at the transmitters. Reference [10] derived a genie-aided bound to assess the capacity advantage of non-causal state over causal state for both the point-to-point channels and MACs with independent state sequences available at the two transmitters. Reference [11] explicitly characterized the capacity region of a cooperative

MAC with states non-causally available at one encoder, while reference [12] proposed several inner and outer bounds for a MAC with states non-causally known to some encoders. A lattice coding strategy was proposed for a MAC with non-causal state information as in [13] and [14].

While the work summarized above focused on non-causal or causal state information, recently, references [15] and [16] have demonstrated that, even with strictly casual state information at the encoders of a state-dependent MAC channel, an improvement in the capacity region is possible. In [15], a common state sequence is known either strictly causally or causally at both of encoders in a two-user MAC, while in [16] two independent state sequences are present with each strictly causally or causally known to one encoder. An achievable rate region is derived in both papers and the capacity region is identified for some special cases including Gaussian models. The main idea in the achievability proofs is to use a block Markov coding scheme in which the two users cooperatively [15] or non-cooperatively [16] transmit compressed state information to the decoder, which in turn uses such information to perform coherent decoding. The results show that an increase in the capacity region can be obtained by devoting part of the transmission resources to the transmission of the compressed state.

In this paper, we first focus on the MAC with independent states each strictly causally known to one transmitter of [16]. Combining the same idea of letting transmitters convey a compressed version of the state sequence to the destination, we propose a new achievable scheme with simple encoding and a decoding strategy similar to the noisy network coding [17]. The resulting achievable rate region is potentially larger than the original since it admits a larger input distribution. The capacity result for Gaussian channels of [16] for the case of a single state sequence is generalized to a larger class of channels that includes modulo-additive state-dependent MACs. The proposed scheme is then extended to arbitrary number of users. A similar scheme is also applied to derive an achievable rate region for the MAC of arbitrary number of users with common state. As a special case, it is shown to recover the region for the two-user MAC with common state given in [15].

Finally, we introduce output feedback in our model with independent states. We show via a specific example that feedback allows user cooperation for the transmission of state information to the receiver, beside standard cooperation on the transmission of messages [18], and this increases the capacity region. This observation is somewhat related to recent work [19] where it is shown that common state information allows empirical coordination in a MAC with non-causal state information, along with state information at the decoder and conferencing links between encoders.

The remainder of the paper is organized as follows: In Section II, we describe the general model considered in this work and summarize some existing results in [16]. Sections III and IV focus on a two-user state-dependent MAC. Section V provides a generalization to arbitrary number of users with independent states. Section VI studies MACs of arbitrary number of users with common state. Section VII introduces output feedback and provides an example to show the benefits. Section VIII concludes the paper.

Throughout the paper probability distributions are denoted by P subscripted by the random variables involved, e.g., $P_X(x)$ is the probability of $X = x$, $P_{Y|X}(y|x)$ is the conditional probability of $Y = y$ given $X = x$, etc. When the meaning is clear from the context, we will drop subscripts from the probability functions, e.g., $P(x)$ will stand for $P_X(x)$. Also x_k^i denotes vector $[x_{k1}, ..., x_{ki}]$. $\mathbb{E}[X]$ denotes the expectation of random variable X. $\mathbb{R}_i^+$ denotes the set of non-negative real vectors in i dimension. Notation co refers to the convex hull operation of a set. $\mathcal{N}(0, \sigma^2)$ denotes a zero-mean Gaussian distribution with variance σ^2. $C(x)$ is defined as $C(x) = \frac{1}{2}\log_2(1 + x)$.

II. CHANNEL MODEL AND PRELIMINARIES

In this section, we describe our channel models, formulate the problem and revisit some related results derived in previous work [16].

A. MAC with Independent States

We first investigate an M-user discrete memoryless MAC channel with M mutually independent states, which is denoted by:

$$(\mathcal{X}_1 \times ... \times \mathcal{X}_M, \mathcal{S}_1 \times ... \times \mathcal{S}_M, \mathcal{Y}, P(s_1)...P(s_M), P(y|x_1, ..., x_M, s_1, ..., s_M)) \tag{1}$$

with input alphabets $(\mathcal{X}_1, ..., \mathcal{X}_M)$, output alphabet $\mathcal{Y}$ and state alphabets $(\mathcal{S}_1, ..., \mathcal{S}_M)$. The state sequences are assumed to be i.i.d. and are mutually independent, i.e., $\prod_{k=1}^{M} P(s_k^n) = \prod_{k=1}^{M}\prod_{i=1}^{n} P(s_{ki})$. The state-dependent channel is memoryless in the sense that at any discrete time $i = 1, ..., n$:

$$P\left(y_i \left| x_1^n, ..., x_M^n, s_1^n, ..., s_M^n, y^{i-1}\right.\right) = P(y_i | x_{1i}, ..., x_{Mi}, s_{1i}, ..., s_{Mi}). \tag{2}$$

Each state realization is available to one encoder in a *strictly causal* manner as defined in Section I. Transmitter k's signal x_k^n is subject to an average input cost constraint:

$$\frac{1}{n}\sum_{i=1}^{n}\mathbb{E}\left[c_k\left(X_{ki}\right)\right]\leq\Gamma_k,\quad k=1,...,M, \tag{3}$$

where $c_k:\mathcal{X}_k\rightarrow\mathbb{R}^+$ is a single-letter input cost function for transmitter k and the expectation is taken with respect to all the messages and states. We now define the following code.

Definition 1: Let w_k, uniformly distributed over the set $\mathcal{W}_k=[1:2^{nR_k}]$, be the message sent by transmitter k. A $(2^{nR_1},...,2^{nR_M},n,\Gamma_1,...,\Gamma_M)$ code with strictly causal and independent state information at the encoders consists of sequences of encoder mappings:

$$f_{k,i}:\quad\mathcal{W}_k\times\mathcal{S}_k^{i-1}\rightarrow\mathcal{X}_{ki},\quad i=1,...,n,\quad k=1,...,M, \tag{4}$$

each of which maps message w_k to a channel input such that (3) is satisfied, and a decoder mapping

$$g:\quad\mathcal{Y}^n\rightarrow\mathcal{W}_1\times...\times\mathcal{W}_M, \tag{5}$$

which produces the estimate of messages $(w_1,...,w_M)$.

The average probability of error, $\Pr\left(E\right)$, is defined by:

$$\Pr\left(E\right)=\frac{1}{\prod\limits_{k=1}^{M}2^{nR_k}}\sum_{w_1=1}^{2^{nR_1}}...\sum_{w_M=1}^{2^{nR_M}}\Pr\left(g\left(y^n\right)\neq\left(w_1,...,w_M\right)\left|\left(w_1,...,w_M\right)\quad sent\right.\right) \tag{6}$$

Given a cost tuple $\mathbf{\Gamma}=(\Gamma_1,...,\Gamma_M)$, a rate tuple $(R_1,...,R_M)$ is said to be $\mathbf{\Gamma}$-achievable if there exists a sequence of codes $(2^{nR_1},...,2^{nR_M},n,\Gamma_1,...,\Gamma_M)$ defined above such that the probability of error $\Pr(E)\rightarrow 0$ as $n\rightarrow\infty$. The capacity region $\mathcal{C}\left(\mathbf{\Gamma}\right)$ is the closure of all the $\mathbf{\Gamma}$-achievable rate tuples.

B. MAC with Common State

We also investigate a general M-user discrete memoryless MAC channel with common state, which is denoted by:

$$\left(\mathcal{X}_1\times...\times\mathcal{X}_M,\mathcal{S},\mathcal{Y},P\left(s\right),P\left(y\left|x_1,...,x_M,s\right.\right)\right) \tag{7}$$

with input alphabets $(\mathcal{X}_1, ..., \mathcal{X}_M)$, output alphabet $\mathcal{Y}$ and state alphabet $\mathcal{S}$. The state sequence is assumed to be i.i.d., i.e., $P(s^n) = \prod_{i=1}^{n} P(s_i)$. Moreover, the state-dependent channel is memoryless in the sense that at any discrete time $i = 1, ..., n$, we have

$$P\left(y_i \left| x_1^n, ..., x_M^n, s^n, y^{i-1}\right.\right) = P\left(y_i \left| x_{1i}, ..., x_{Mi}, s_i\right.\right). \tag{8}$$

Assume the common state is strictly causally known to all encoders. Again, each transmitted sequence x_k^n is subject to an average input cost constraint:

$$\frac{1}{n}\sum_{i=1}^{n} \mathbb{E}\left[c_k\left(X_{ki}\right)\right] \leq \Gamma_k, \quad k = 1, ..., M, \tag{9}$$

where $c_k : \mathcal{X}_k \to \mathbb{R}^+$ is a single-letter input cost function for transmitter k and the expectation is taken with respect to all the messages and states. We have the following code definition.

Definition 2: Let w_k, uniformly distributed over the set $\mathcal{W}_k = [1 : 2^{nR_k}]$, be the message sent by transmitter k. A $(2^{nR_1}, ..., 2^{nR_M}, n, \Gamma_1, ..., \Gamma_M)$ code with strictly causal common state information at the encoders consists of sequences of encoder mappings:

$$f_{k,i}: \quad \mathcal{W}_k \times \mathcal{S}^{i-1} \to \mathcal{X}_{ki}, \quad i = 1, ..., n, \quad k = 1, ..., M, \tag{10}$$

each of which maps message w_k to a channel input such that (9) is satisfied, and a decoder mapping

$$g: \quad \mathcal{Y}^n \to \mathcal{W}_1 \times ... \times \mathcal{W}_M, \tag{11}$$

which produces the estimate of messages $(w_1, ..., w_M)$.

The average probability of error $\Pr(E)$, the $\mathbf{\Gamma}$-achievable rates and the capacity region $\mathcal{C}(\mathbf{\Gamma})$ are defined as was done for the model in II-A.

We first restrict our attention to a two-user MAC with two independent states, and then generalize to an arbitrary M-user MAC with independent states in Section V. We study an arbitrary M-user MAC with common state in Section VI.

C. Preliminaries

For comparison, we summarize and slightly extend a key result of [16].

Theorem 1: [16] Let $\mathbf{\Gamma} = (\Gamma_1, \Gamma_2)$ be given. For the two-user MAC with strictly causal state information, a $\mathbf{\Gamma}$-achievable rate region is given by:

$$\bar{\mathcal{R}}_{in1}\left(\Gamma_1, \Gamma_2\right) \triangleq \left\{ \begin{array}{c} (R_1, R_2) : \left(\left(R_1, R_2\right), \left(\Gamma_1, \Gamma_2\right)\right) \in \\ \text{co} \bigcup\limits_{\beta_1>0, \beta_2>0} \left(\mathcal{R}_{in1}\left(\beta_1, \beta_2\right), \left(\beta_1, \beta_2\right)\right) \end{array} \right\} \tag{12}$$

where $\mathcal{R}_{in1}\left(\beta_1, \beta_2\right)$ is the union of the sets:

$$\mathcal{R}_{in1}\left(\beta_1, \beta_2\right) \triangleq \bigcup \left\{ \begin{array}{l} (R_1, R_2) \in \mathbb{R}_2^+ : \\ R_1 \le I\left(X_1; Y \left| X_2, V_1, V_2\right.\right) - I\left(V_1; S_1 \left| Y, V_2\right.\right) \\ R_2 \le I\left(X_2; Y \left| X_1, V_1, V_2\right.\right) - I\left(V_2; S_2 \left| Y, V_1\right.\right) \\ R_1 + R_2 \le I\left(X_1, X_2; Y \left| V_1, V_2\right.\right) - I\left(V_1, V_2; S_1, S_2 \left| Y\right.\right) \end{array} \right\} \tag{13}$$

with the union taken over the distributions in the set of

$$\mathcal{P}_{sc} = \left\{ P_{V_1, V_2, S_1, S_2, X_1, X_2, Y} : P_{V_1|S_1} P_{V_2|S_2} P_{S_1} P_{S_2} P_{X_1} P_{X_2} P_{Y|S_1, S_2, X_1, X_2} \right\} \tag{14}$$

satisfying $\mathbb{E}\left[c_k\left(X_k\right)\right] \le \beta_k, \;\; k = 1, 2$.

Remark 1: The $\mathbf{\Gamma}$-achievable region given here is a straightforward extension from the original one in [16] where time-sharing among different cost constraints is allowed, see for example, [20].

The basic idea of the achievable scheme of Theorem 1 is to let transmitters convey a compressed version of the state, namely V_1 for S_1 and V_2 for S_2, to the receiver. The decoder can then use this partial information about the state to improve decoding. As an example, if the state models fading channels, state information enables partially coherent decoding. The proof of the theorem, though not available in detail in [16], is there indicated to be based on a scheme that exploits distributed Wyner-Ziv compression [21] and block Markov encoding in [16]. $\square$

III. A New Achievable Rate Region

In this section, for the two-user MAC with two independent states, we propose a new achievable scheme that is based on simple encoding, whereby no block-Markov operation is necessary, and on a decoding strategy that is similar to that of the noisy network coding scheme of [17]. The scheme achieves a potentially larger achievable rate region and can be easily generalized to an arbitrary number of users as discussed in Section V.

Theorem 2: Let $\mathbf{\Gamma} = (\Gamma_1, \Gamma_2)$ be given. For the two-user MAC with strictly causal state information, a $\mathbf{\Gamma}$-achievable rate region is given by

$$\bar{\mathcal{R}}_{in2}\left(\Gamma_1, \Gamma_2\right) \triangleq \left\{ \begin{array}{c} (R_1, R_2) : \left(\left(R_1, R_2\right), \left(\Gamma_1, \Gamma_2\right)\right) \in \\ \mathrm{co} \bigcup\limits_{\beta_1 > 0, \beta_2 > 0} \left(\mathcal{R}_{in2}\left(\beta_1, \beta_2\right), \left(\beta_1, \beta_2\right)\right) \end{array} \right\} \tag{15}$$

where $\mathcal{R}_{in2}\left(\beta_1, \beta_2\right)$ is the union of the sets:

$$\mathcal{R}_{in2}\left(\beta_1, \beta_2\right) \triangleq \bigcup \left\{ \begin{array}{l} (R_1, R_2) \in \mathbb{R}_2^+ : \\ R_1 < I\left(X_1, V_1; Y \left| X_2, V_2 \right.\right) - I\left(V_1; S_1 \left| X_1 \right.\right) \\ R_2 < I\left(X_2, V_2; Y \left| X_1, V_1 \right.\right) - I\left(V_2; S_2 \left| X_2 \right.\right) \\ R_1 + R_2 < I\left(X_1, X_2, V_1, V_2; Y\right) - I\left(V_1; S_1 \left| X_1 \right.\right) - I\left(V_2; S_2 \left| X_2 \right.\right) \end{array} \right\} \tag{16}$$

with the union taken over the distributions in the set of

$$\mathcal{P}_{sc}^* = \left\{ P_{V_1, V_2, S_1, S_2, X_1, X_2, Y} : P_{V_1 | S_1, X_1} P_{V_2 | S_2, X_2} P_{S_1} P_{S_2} P_{X_1} P_{X_2} P_{Y | S_1, S_2, X_1, X_2} \right\} \tag{17}$$

satisfying $\mathbb{E}\left[c_k\left(X_k\right)\right] \leq \beta_k, \quad k = 1, 2$.

Proof: The theorem follows as a special case of the M-user result of Theorem 5 for $M = 2$. We refer the reader to Appendix A for the proof of Theorem 5. ■

Remark 2: The region (16) is potentially larger than (13) since it allows a more general input distribution. In fact, it is admissible to generate V_k dependent of both S_k and X_k, $k = 1, 2$. This is proved in Theorem 3. □

Remark 3: In the proposed strategy, similar to [16], at each block, each transmitter sends out a codeword which carries both message information and information regarding the state sequence in the previous block. However, unlike [16], the encoders do not use block Markov coding but instead encode the entire message over all the blocks, as in noisy network coding scheme of [17]. Moreover, as in [17], the decoding is implemented jointly over all blocks without requirement of decoding all compressed states correctly. □

Remark 4: By applying the strategy in [5] as done in Theorem 2 in [16], our proposed technique can be easily generalized to a system where channel state information is known causally to the encoders. Details are omitted for the sake of conciseness. □

Theorem 3: The new achievable rate region of Theorem 2 includes the original of Theorem 1, i.e., $\bar{\mathcal{R}}_{in2}\left(\Gamma_1, \Gamma_2\right) \supseteq \bar{\mathcal{R}}_{in1}\left(\Gamma_1, \Gamma_2\right)$ for all cost constraint pairs (Γ_1, Γ_2).

Proof: Given any cost constraint pair (β_1, β_2), setting $P_{V_1|S_1,X_1} = P_{V_1|S_1}$ and $P_{V_2|S_2,X_2} = P_{V_2|S_2}$ in $\mathcal{R}_{in2}(\beta_1, \beta_2)$ we obtain the following,

1) For the sum-rate bound,

$$R_1 + R_2 < I(X_1, X_2; Y|V_1, V_2) + I(V_1, V_2; Y) - I(V_1; S_1|X_1) - I(V_2; S_2|X_2) \quad (18)$$

$$= I(X_1, X_2; Y|V_1, V_2) + H(V_1|S_1) + H(V_2|S_2) - H(V_1, V_2|Y) \quad (19)$$

$$= I(X_1, X_2; Y|V_1, V_2) + H(V_1|S_1, S_2, Y) + H(V_2|S_2, S_1, V_1, Y) - H(V_1, V_2|Y) \quad (20)$$

$$= I(X_1, X_2; Y|V_1, V_2) - I(V_1, V_2; S_1, S_2|Y) \quad (21)$$

   where (20) follows from the Markov chain $(V_1, V_2) \leftrightarrow (S_1, S_2) \leftrightarrow Y$ and from the fact that (V_1, S_1) are independent of (V_2, S_2). Note the last equation is exactly the same sum-rate bound in $\mathcal{R}_{in1}(\beta_1, \beta_2)$ given by (13).

2) For the individual rate bound on R_1,

$$R_1 < I(X_1; Y|X_2, V_1, V_2) + I(V_1; Y|X_2, V_2) - I(V_1; S_1|X_1) \quad (22)$$

$$= I(X_1; Y|X_2, V_1, V_2) + H(V_1|S_1) - H(V_1|Y, X_2, V_2) \quad (23)$$

$$\geq I(X_1; Y|X_2, V_1, V_2) + H(V_1|S_1) - H(V_1|Y, V_2) \quad (24)$$

$$= I(X_1; Y|X_2, V_1, V_2) + H(V_1|S_1, Y, V_2) - H(V_1|Y, V_2) \quad (25)$$

$$= I(X_1; Y|X_2, V_1, V_2) - I(V_1; S_1|Y, V_2) \quad (26)$$

   where (24) follows from conditioning reduces entropy while (25) follows from the Markov chain $V_1 \leftrightarrow S_1 \leftrightarrow Y$. The last equation is exactly the same as the bound on R_1 in $\mathcal{R}_{in1}(\beta_1, \beta_2)$ given by (13).

3) A similar observation holds for R_2 by symmetry.

These three facts imply that $\mathcal{R}_{in2}(\beta_1, \beta_2) \supseteq \mathcal{R}_{in1}(\beta_1, \beta_2)$ and applying time-sharing among different cost constraints, we conclude that $\bar{\mathcal{R}}_{in2}(\Gamma_1, \Gamma_2) \supseteq \bar{\mathcal{R}}_{in1}(\Gamma_1, \Gamma_2)$ for all every cost constraint pair (Γ_1, Γ_2). ■

IV. CAPACITY RESULT

In this section, we generalize the capacity result for Gaussian channels of [16] for the special case of a single state sequence to a larger class of channels. We also provide an example that demonstrates the benefits of strictly casual state information.

Consider a class of discrete memoryless two-user deterministic MACs denoted by $\mathcal{D}_{MAC}$, in which the output Y is a deterministic function of inputs X_1, X_2 and the channel state S:

$$Y = f\left(X_1, X_2, S\right), \tag{27}$$

and where state S is strictly causally known to encoder 1, while the deterministic function $f\left(.,.,.\right)$ satisfies the following assumption:

$$H\left(Y\left|X_1, X_2\right.\right) = H\left(S\right) \tag{28}$$

for all product input distributions $P_{X_1}P_{X_2}$ satisfying input cost constraints (3) for $k = 1, 2$.

Then the capacity region for $\mathcal{D}_{MAC}$ is identified as follows.

Theorem 4: Let $\mathbf{\Gamma} = \left(\Gamma_1, \Gamma_2\right)$ be given. For any MAC in $\mathcal{D}_{MAC}$ defined above, the capacity region $\mathcal{C}\left(\mathbf{\Gamma}\right)$ is given by:

$$\mathcal{C}\left(\mathbf{\Gamma}\right) \triangleq \bigcup \left\{ \begin{array}{l} \left(R_1, R_2\right) \in \mathbb{R}_2^+ : \\ R_1 \le H\left(Y\left|X_2, Q\right.\right) - H\left(S\right) \\ R_2 \le H\left(Y\left|X_1, S, Q\right.\right) \\ R_1 + R_2 \le H\left(Y\left|Q\right.\right) - H\left(S\right) \end{array} \right\} \tag{29}$$

where the union is taken over all product input distributions $P_{X_1|Q}P_{X_2|Q}P_Q$ satisfying $\mathbb{E}\left[c_k\left(X_k\right)\right] \le \Gamma_k$, $k = 1, 2$, and Q is an auxiliary random variable with cardinality bound $|\mathcal{Q}| \le 5$.

Proof:

- **Achievability**:

  We provide the proof of achievability for $Q = q$ constant and drop the conditioning on q for simplicity. The region (29) then follows by using coded time-sharing [22].

  Fix $P_{X_1}P_{X_2}P_SP_{Y|X_1,X_2,S}$ and $\mathbb{E}\left[c_k\left(X_k\right)\right] \le \Gamma_k,\ \ k = 1, 2$, for a given $Q = q$. By setting $V_2 = S_2 = \emptyset$ and $V_1 = S_1 = S$ in the achievable region (16) we derived, exploiting the property (28) of deterministic channels, rate pair $\left(R_1, R_2\right)$ is achievable where

$$R_1 < I\left(X_1, S; Y\left|X_2\right.\right) - I\left(S; S\left|X_1\right.\right) \tag{30}$$

$$= H\left(Y\left|X_2\right.\right) - H\left(S\right), \tag{31}$$

$$R_2 < I\left(X_2; Y\left|X_1, S\right.\right) \tag{32}$$

$$= H\left(Y\left|X_1, S\right.\right), \tag{33}$$

$$R_1 + R_2 < I\left(X_1, X_2, S; Y\right) - I\left(S; S\left|X_1\right.\right) \tag{34}$$

$$= H\left(Y\right) - H\left(S\right) \tag{35}$$

and

$$\mathbb{E}\left[c_k\left(X_k\right]\right)\right] \le \Gamma_k, \quad k = 1, 2. \tag{36}$$

- **Converse**:

  Introduce a random variable Q uniformly distributed over the set $\{1, 2, ..., n\}$.

  From Proposition 1 and 2 in [16], we have:

$$R_1 \le \frac{1}{n}\sum_{i=1}^{n} I\left(X_{1i}; Y_i\left|X_{2i}\right.\right) + \epsilon_n \tag{37}$$

$$R_1 + R_2 \le \frac{1}{n}\sum_{i=1}^{n} I\left(X_{1i}, X_{2i}; Y_i\right) + \epsilon_n \tag{38}$$

so that

$$R_1 \le \frac{1}{n}\sum_{i=1}^{n} I\left(X_{1q}; Y_q\left|X_{2q}, Q = i\right.\right) + \epsilon_n \tag{39}$$

$$= I\left(X_{1Q}; Y_Q\left|X_{2Q}, Q\right.\right) + \epsilon_n \tag{40}$$

$$= I\left(X_1; Y\left|X_2, Q\right.\right) + \epsilon_n \tag{41}$$

$$= H\left(Y\left|X_2, Q\right.\right) - H\left(S\right) + \epsilon_n \tag{42}$$

and

$$R_1 + R_2 \le \frac{1}{n}\sum_{i=1}^{n} I\left(X_{1q}, X_{2q}; Y_q\left|Q = i\right.\right) + \epsilon_n \tag{43}$$

$$= I\left(X_{1Q}, X_{2Q}; Y_Q\left|Q\right.\right) + \epsilon_n \tag{44}$$

$$= I\left(X_1, X_2; Y\left|Q\right.\right) + \epsilon_n \tag{45}$$

$$= H\left(Y\left|Q\right.\right) - H\left(S\right) + \epsilon_n \tag{46}$$

where $\epsilon_n \to 0$ as $n \to \infty$.

Moreover, by providing perfect state information to the receiver, one can easily prove the following bound:

$$R_2 \le \frac{1}{n}\sum_{i=1}^{n} I\left(X_{2i}; Y_i\left|X_{1i}, S_i\right.\right) + \epsilon_n \tag{47}$$

$$= \frac{1}{n}\sum_{i=1}^{n} I\left(X_{2q}; Y_q \left| X_{1q}, S_q, Q = i\right.\right) + \epsilon_n \tag{48}$$

$$= I\left(X_{2Q}; Y_Q \left| X_{1Q}, S_Q, Q\right.\right) + \epsilon_n \tag{49}$$

$$= I\left(X_2; Y \left| X_1, S, Q\right.\right) + \epsilon_n \tag{50}$$

$$= H\left(Y \left| X_1, S, Q\right.\right) + \epsilon_n \tag{51}$$

where $\epsilon_n \to 0$ as $n \to \infty$. It can be seen that the distribution on (Q, S, X_1, X_2, Y) from a given code is of the form $P_{Q,S,X_1,X_2,Y} = P_Q P_{X_1|Q} P_{X_2|Q} P_S P_{Y|X_1,X_2,S}$. Notice that both (42) and (46) exploits property (28) and the fact that S is independent of Q.

For the cost constraints, starting from the definition (3), we have

$$\Gamma_k \geq \frac{1}{n}\sum_{i=1}^{n} \mathbb{E}\left[c_k\left(X_{ki}\right)\right] \tag{52}$$

$$= \frac{1}{n}\sum_{i=1}^{n}\sum_{x_{ki}} \Pr\left(x_{ki}\right) c_k\left(x_{ki}\right) \tag{53}$$

$$= \sum_{q=1}^{n}\frac{1}{n}\sum_{x_k} \Pr\left(x_k \left| q\right.\right) c_k\left(x_k\right) \tag{54}$$

$$= \mathbb{E}\left[c_k\left(X_k\right)\right]. \tag{55}$$

Finally, considering the five continuous functions of $\Pr\left(x_1 \left| q\right.\right)\Pr\left(x_2 \left| q\right.\right)$,

$$g_1 = H\left(Y \left| X_2, Q = q\right.\right), g_2 = H\left(Y \left| X_1, S, Q = q\right.\right), g_3 = H\left(Y \left| Q = q\right.\right), \tag{56}$$

$$g_4 = \mathbb{E}\left[c_1\left(X_1\right) \left| Q = q\right.\right], g_5 = \mathbb{E}\left[c_2\left(X_2\right) \left| Q = q\right.\right], \tag{57}$$

one can easily establish the cardinality bound $|\mathcal{Q}| \leq 5$ by the Lemma in Appendix C of [22]. This concludes the converse and thus establishes the capacity region.

■

Remark 5: Notice that in the achievability proof, we set $V_1 = S_1 = S$, which implies that V_1 is independent of X_1. Hence the achievable scheme proposed in [16] is also optimal for the class of channels considered here. □

Remark 6: The class $\mathcal{D}_{MAC}$ includes the Gaussian model considered in [16], which is defined as $Y_i = X_{1i} + X_{2i} + S_i$ with input power constraints $\frac{1}{n}\sum_{i=1}^{n}\mathbb{E}\left[X_{ki}^2\right] \leq P_k$ and $S_i \sim \mathcal{N}\left(0, \sigma_s^2\right)$ strictly causally known to encoder 1. The capacity region $\mathcal{C}^{snf}$ is given by:

$$\mathcal{C}^{snf} = \left\{ \begin{array}{l} (R_1, R_2) \in \mathbb{R}_2^+ : \\ R_1 \leq C\left(\frac{P_1}{\sigma_s^2}\right) \\ R_1 + R_2 \leq C\left(\frac{P_1+P_2}{\sigma_s^2}\right) \end{array} \right\}. \tag{58}$$

This can be identified from Theorem 4 by simple extension to continuous alphabets and evaluating each bound by the maximum entropy theorem [23]. Note that when providing both S and X_1 to the receiver, the channel from user 2 to the receiver is noiseless and hence the individual bound on R_2 goes to infinity, which is redundant. $\square$

Remark 7: The class $\mathcal{D}_{MAC}$ contains more channels along with the Gaussian model discussed in Remark 6. In particular, consider a class of binary modulo-additive state-dependent MAC channels, e.g., $Y = X_1 \oplus X_2 \oplus S$, with input cost constraints $\frac{1}{n}\sum\limits_{i=1}^{n} \mathbb{E}[X_{1i}] \leq p_1$ and $\frac{1}{n}\sum\limits_{i=1}^{n} \mathbb{E}[X_{2i}] \leq p_2$ where $0 < p_1 \leq \frac{1}{2}, 0 < p_2 \leq \frac{1}{2}$. Assume $S \sim Bernoulli\left(p_s\right)$. Note that assumption (28) automatically holds for this class of binary deterministic channels. The capacity region is:

$$\mathcal{C}_{bin}^{s} = \left\{ \begin{array}{l} (R_1, R_2) \in \mathbb{R}_2^+ : \\ R_1 \leq H_b\left(p_1 * p_s\right) - H_b\left(p_s\right) \\ R_2 \leq H_b\left(p_2\right) \\ R_1 + R_2 \leq H_b\left(p_1 * p_2 * p_s\right) - H_b\left(p_s\right) \end{array} \right\} \tag{59}$$

where $p_1 * p_2$ denotes the convolution operation of two Bernoulli distributions with parameters p_1 and p_2, i.e., $p_1 * p_2 = p_1\left(1 - p_2\right) + p_2\left(1 - p_1\right)$, and $H_b\left(p\right) = -p\log_2 p - \left(1-p\right)\log_2\left(1-p\right)$.

The capacity region (59) can be identified from Theorem 4 as follows. Given a fixed $Q = q$ and input constraints $\mathbb{E}\left[c_k\left(X_k\right)\left|Q = q\right.\right] \leq p_{kq}$, for some p_{kq} such that $\sum\limits_{Q} p_{kq}\Pr\left(Q = q\right) \leq p_k$, each bound in (29) is maximized by the same input distributions $Bernoulli\left(p_{kq}\right)$, $k = 1, 2$. For example, on bound R_1

$$H\left(Y\left|X_2, Q = q\right.\right) - H\left(S\right) \tag{60}$$

$$= H\left(X_1 \oplus S\left|Q = q\right.\right) - H_b\left(p_s\right) \tag{61}$$

$$\leq H_b\left(p_{1q} * p_s\right) - H_b\left(p_s\right) \tag{62}$$

where (62) follows from the fact that entropy $H\left(X_1 \oplus S\left|Q = q\right.\right)$ monotonically increases with the probability of $X_1 = 1$. Hence,

$$H\left(Y\left|X_2, Q\right.\right) - H\left(S\right) \tag{63}$$

$$= \sum_{Q} H\left(Y\left|X_2, Q = q\right.\right) - H\left(S\right) \tag{64}$$

$$\leq \sum_{Q} H_b\left(p_{1q} * p_s\right) - H_b\left(p_s\right) \tag{65}$$

$$\leq H_b\left(p_1 * p_s\right) - H_b\left(p_s\right) \tag{66}$$

where (66) follows by the concavity of entropy. Thus there is no need for time-sharing among different cost constraints. By similar arguments on the other two bounds, we claim the capacity region in (59). □

Remark 8: It is known from that, without state information, the capacity region for this MAC channel is given by [23]:

$$\mathcal{C}_{bin}^{ns} = \left\{ \begin{array}{l} \left(R_1, R_2\right) \in \mathbb{R}_2^+ : \\ R_1 \leq H_b\left(p_1 * p_s\right) - H_b\left(p_s\right) \\ R_2 \leq H_b\left(p_2 * p_s\right) - H_b\left(p_s\right) \\ R_1 + R_2 \leq H_b\left(p_1 * p_2 * p_s\right) - H_b\left(p_s\right) \end{array} \right\} \tag{67}$$

Hence $\mathcal{C}_{bin}^{ns} \subseteq \mathcal{C}_{bin}^{s}$, which demonstrates the benefit of strictly causal state information in enlarging the capacity region. For a numerical example, we set $p_1 = p_2 = \frac{1}{3}$ and $p_s = \frac{1}{4}$. The corresponding regions (59) and (67) are depicted and compared in Fig. 1. It is evident that the presence of strictly causal state information at encoder 1 improves the maximum rate of user 2. □

Remark 9: Consider the class of models discussed in the previous example $p_1 = p_2 = p$. We now discuss an alternative way to achieve the maximum rate of user 2, i.e., $R_{2,max} = H_b\left(p * p * p_s\right) - H_b\left(p_s\right)$, for cases where the individual bound on R_2 is larger than the sum-rate bound.

The scheme works as follows. We split the rate of user 2 into two parts, i.e., $R_2 = R_{2p} + R_{2c}$. The total number of channel uses is divided in blocks in a different fashion for the two users: For user 1, each block is of unequal length while for user 2, each block consists of the same number, say m, of channel uses. Notice that both users employ potentially all channel uses but the block boundaries are different. In the first block of size m (same for both users), user 1 keeps silent and user 2 precodes message $w_{2c} \in \left[1 : 2^{mH_b(p)}\right]$ into block of information $x_{2c}^m\left(w_{2c}\right)$ that look i.i.d according to input distribution $Bernoulli\left(p\right)$ and sends it out over m channel uses [24]. At the end of this block, user 1 learns the state sequence and it starts to help user 2 to convey the state information to the receiver. Explicitly, for each subsequent block, user 1 losslessly

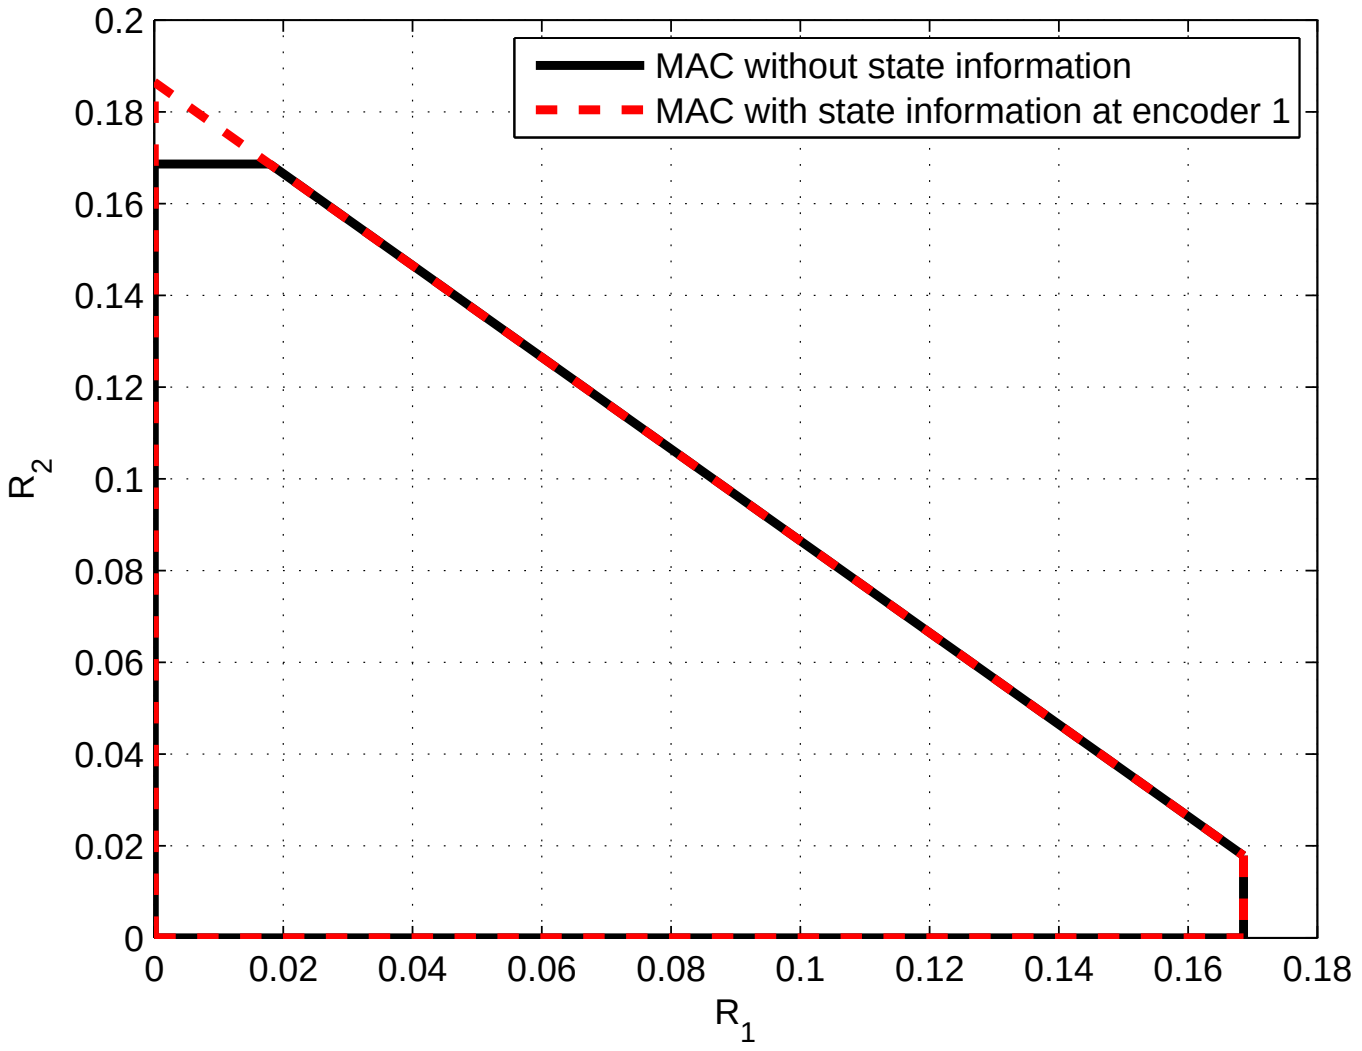

Fig. 1. Capacity region for an example of modulo-additive state-dependent MAC with input constraints ($p_1 = p_2 = \frac{1}{3}, p_s = \frac{1}{4}$)

compresses the state sequence in the previous block and sends out the index over current block consisting of certain number of channel uses governed by the rule in [24]. Superimposed with transmission of user 1, user 2 sends out a new codeword $x_{2p}^m\left(w_{2p,j}\right)$ with $w_{2p,j} \in \left[1 : 2^{mR_{2p}}\right]$, which is drawn from a binary codebook randomly and independently generated subject to the input constraint for each block j, $j \geq 2$. The receiver performs successive decoding, i.e., first decodes $w_{2p,j}$ for each block treating binary bits sent by user 1 and states as noise, subtracts them out, and then decodes w_{2c}. As the total number of channel uses $n \to \infty$, it can be shown that rate $R_{2p} = I\left(X_{2p}; Y\right) = H_b\left(p * p * p_s\right) - H_b\left(p * p_s\right)$ is achievable. After decoding $w_{2p,j}$ for each block, subtracting them out from the received signal, by analysis in [24], w_{2c} can be successfully decoded at rate $R_{2c} = H_b\left(p * p_s\right) - H_b\left(p_s\right)$, thanks to the state refinement from user 1. Therefore $R_{2,max} = R_{2c} + R_{2p} = H_b\left(p * p * p_s\right) - H_b\left(p_s\right)$ is achieved for user 2. $\square$

V. GENERALIZATION TO M USERS WITH INDEPENDENT STATES

In this section, we generalize the proposed achievable scheme to an arbitrary number of users with independent states.

Let $\mathcal{S}$ denote any subset of $[1:M]$, i.e., $\mathcal{S} \subseteq [1:M]$ and $\mathcal{S}^c$ be the complement of $\mathcal{S}$. Any random vector $\mathbf{X}\left(\mathcal{S}\right)$ is defined by $\mathbf{X}\left(\mathcal{S}\right) \triangleq \left(X_1, X_2, ..., X_k\right), k = |\mathcal{S}|$, i.e., the cardinality of $\mathcal{S}$.

Theorem 5: Let $\mathbf{\Gamma} = (\Gamma_1, ..., \Gamma_M)$ be given. For the M-user MAC with strictly causal and independent state information, a $\mathbf{\Gamma}$-achievable rate region is given by

$$\bar{\mathcal{R}}_{in}^{M}\left(\Gamma_1, ..., \Gamma_M\right) \triangleq \left\{ \begin{array}{c} \left(R_1, ..., R_M\right) : \left(\left(R_1, ..., R_M\right), \left(\Gamma_1, ..., \Gamma_M\right)\right) \in \\ \text{co} \bigcup\limits_{\beta_1 > 0, ..., \beta_M > 0} \left(\mathcal{R}_{in}^{M}\left(\beta_1, ..., \beta_M\right), \left(\beta_1, ..., \beta_M\right)\right) \end{array} \right\} \tag{68}$$

where $\mathcal{R}_{in}^{M}\left(\beta_1, ..., \beta_M\right)$ is the union of the sets:

$$\mathcal{R}_{in}^{M}\left(\beta_1, ..., \beta_M\right) \triangleq \bigcup \left\{ \begin{array}{l} \left(R_1, ..., R_M\right) \in \mathbb{R}_M^{+} : \\ \sum\limits_{k \in \mathcal{T}} R_k < \min\limits_{\substack{\mathcal{S} \subseteq [1:M] \\ \mathcal{T} \subseteq \mathcal{S}}} \Bigg(I\left(\mathbf{X}\left(\mathcal{S}\right), \mathbf{V}\left(\mathcal{S}\right); Y \left| \mathbf{X}\left(\mathcal{S}^c\right), \mathbf{V}\left(\mathcal{S}^c\right)\right.\right) - \sum\limits_{k \in \mathcal{S}} I\left(V_k; S_k \left| X_k\right.\right) \Bigg), \\ \forall \;\; \mathcal{T} \subseteq [1:M] \end{array} \right\} \tag{69}$$

with the union taken over the distributions in the set of

$$\mathcal{P}_{sc}^{M} = \left\{ P_{V_1, ..., V_M, S_1, ..., S_M, X_1, ..., X_M, Y} : \prod_{k=1}^{M} \left(P_{V_k | S_k, X_k} P_{S_k} P_{X_k}\right) P_{Y | S_1, ..., S_M, X_1, ..., X_M} \right\} \tag{70}$$

satisfying $\mathbb{E}\left[c_k\left(X_k\right)\right] \le \beta_k, \;\; k = 1, ..., M$.

Proof: See Appendix A. ■

VI. M-USER MAC WITH COMMON STATE

In this section, we apply a similar scheme to that for the MAC with independent states and derive an achievable rate region for the M-user MAC with common state information.

Theorem 6: Let $\mathbf{\Gamma} = (\Gamma_1, ..., \Gamma_M)$ be given. For the M-user MAC with strictly causal common state information, a $\mathbf{\Gamma}$-achievable rate region is given by

$$\bar{\mathcal{R}}_{in}^{M,c}\left(\Gamma_1, ..., \Gamma_M\right) \triangleq \left\{ \begin{array}{c} \left(R_1, ..., R_M\right) : \left(\left(R_1, ..., R_M\right), \left(\Gamma_1, ..., \Gamma_M\right)\right) \in \\ \text{co} \bigcup\limits_{\beta_1 > 0, ..., \beta_M > 0} \left(\mathcal{R}_{in}^{M,c}\left(\beta_1, ..., \beta_M\right), \left(\beta_1, ..., \beta_M\right)\right) \end{array} \right\} \tag{71}$$

where $\mathcal{R}_{in}^{M,c}\left(\beta_1, ..., \beta_M\right)$ is the union of the sets:

$$\mathcal{R}_{in}^{M,c}\left(\beta_1, ..., \beta_M\right) \triangleq \bigcup \left\{ \begin{array}{l} \left(R_1, ..., R_M\right) \in \mathbb{R}_M^{+} : \\ \sum\limits_{k \in [1:M]} R_k < I\left(\mathbf{X}\left([1:M]\right), V; Y\right) - I\left(V; S\right), \\ \sum\limits_{k \in \mathcal{S}} R_k < I\left(\mathbf{X}\left(\mathcal{S}\right); Y \left| U, V, \mathbf{X}\left(\mathcal{S}^c\right)\right.\right), \\ \forall \;\; \mathcal{S} \subseteq [1:M] \end{array} \right\} \tag{72}$$

with the union taken over the distributions in the set of

$$\mathcal{P}_{sc}^{M,c} = \left\{ P_{V,S,U,X_1,...,X_M,Y} : P_S P_{V|S} P_U \left(\prod_{k=1}^{M} P_{X_k|U} \right) P_{Y|S,X_1,...,X_M} \right\} \tag{73}$$

satisfying $\mathbb{E}\left[c_k\left(X_k\right)\right] \leq \beta_k, \quad k = 1, ..., M$.

Proof: The achievable scheme follows a similar idea of state compression-and-forwarding based on noisy network coding while coupled with a cooperative transmission strategy for the MAC with common information [25]. The proof of this theorem is provided in Appendix B. ■

Remark 10: Given any cost pair (β_1, β_2), setting $M = 2$ in $\mathcal{R}_{in}^{M,c}$ derived above, we recover the achievable region for the two-user MAC with common state in [15], which is given by the union of the sets:

$$\mathcal{R}_{in}^{2,c}\left(\beta_1, \beta_2\right) \triangleq \bigcup \left\{ \begin{array}{l} \left(R_1, R_2\right) \in \mathbb{R}_2^+ : \\ R_1 < I\left(X_1; Y \left| U, V, X_2\right.\right) \\ R_2 < I\left(X_2; Y \left| U, V, X_1\right.\right) \\ R_1 + R_2 < I\left(X_1, X_2; Y \left| U, V\right.\right) \\ R_1 + R_2 < I\left(X_1, X_2, V; Y\right) - I\left(V; S\right) \end{array} \right\} \tag{74}$$

where the union is taken over the distributions in the set of

$$\mathcal{P}_{sc}^{2,c} = \left\{ P_{V,S,U,X_1,X_2,Y} : P_S P_{V|S} P_U P_{X_1|U} P_{X_2|U} P_{Y|S,X_1,X_2} \right\} \tag{75}$$

satisfying $\mathbb{E}\left[c_k\left(X_k\right)\right] \leq \beta_k, \quad k = 1, 2.$ □

Remark 11: As shown in [15], (74) is the capacity for the two-user Gaussian MAC where the state comprises the channel noise and it is known strictly causally at both encoders. □

VII. INTRODUCING OUTPUT FEEDBACK

In this section, we briefly consider an extension of the model with independent states studied in Section III where output feedback is available to some encoders in addition to the strictly causal state information. It is well known that the use of output feedback can enable cooperation in regular state-independent MACs as [18], [26], [27]. Here we focus on a specific example and show that output feedback can enlarge the capacity region for the class of MACs studied in this work.

Let us consider a two-user state-dependent Gaussian MAC shown in Fig. 2:

$$Y_i = X_{1i} + X_{2i} + S_i \tag{76}$$

with input cost constraints, e.g., power constraints, $\frac{1}{n}\sum_{i=1}^{n}\mathbb{E}\left[X_{ki}^2\right] \leq P_k$ and $S_i \sim \mathcal{N}\left(0, \sigma_s^2\right)$, for $k = 1, 2$ and $i = 1, ..., n$. Let us assume that the state information is strictly causally known to the first transmitter and a perfect output feedback link is available from the receiver to the second transmitter. We have the following encoder and decoder mappings.

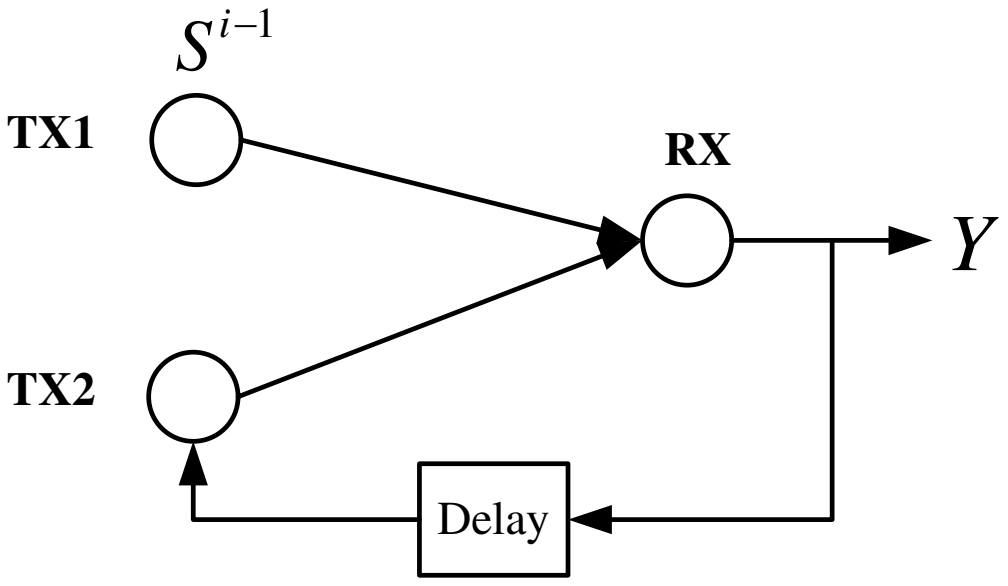

Fig. 2. The state-dependent MAC with strictly causal state information at TX1 and output feedback at TX2.

Definition 3: Let w_k, uniformly distributed over the set $\mathcal{W}_k = [1 : 2^{nR_k}]$, be the message sent by transmitter k, $k = 1, 2$. A $(2^{nR_1}, 2^{nR_2}, n, P_1, P_2)$ code with strictly causal state information at TX1 and output feedback to TX2 consists of sequences of encoder mappings:

$$f_{1,i}: \ \ \mathcal{W}_1 \times \mathcal{S}^{i-1} \rightarrow \mathcal{X}_{1i}, \tag{77}$$

$$f_{2,i}: \ \ \mathcal{W}_2 \times \mathcal{Y}^{i-1} \rightarrow \mathcal{X}_{2i}, \ i = 1, ..., n, \tag{78}$$

such that power constraints are satisfied and a decoder mapping

$$g: \ \ \mathcal{Y}^n \rightarrow \mathcal{W}_1 \times \mathcal{W}_2. \tag{79}$$

And the average probability of error $\Pr(E)$ is defined by:

$$\Pr(E) = \frac{1}{2^{nR_1}2^{nR_2}} \sum_{w_1=1}^{2^{nR_1}} \sum_{w_2=1}^{2^{nR_2}} \Pr\left(g\left(y^n\right) \neq \left(w_1, w_2\right) | \left(w_1, w_2\right) \ \ sent\right) \tag{80}$$

Theorem 7: The capacity region of the model in Fig. 2 is given by:

$$\mathcal{C}^{sf} = \bigcup_{0 \leq \rho \leq 1} \left\{ \begin{array}{l} (R_1, R_2) \in \mathbb{R}_2^+ : \\ R_1 \leq C\left(\frac{\left(1-\rho^2\right)P_1}{\sigma_s^2}\right), \\ R_1 + R_2 \leq C\left(\frac{P_1+P_2+2\rho\sqrt{P_1P_2}}{\sigma_s^2}\right) \end{array} \right\} \tag{81}$$

Remark 12: Without feedback, it is known from [15] that if the state is known strictly causally to both encoders, the capacity is given by:

$$\mathcal{C}^{ss} = \left\{ \begin{array}{l} (R_1, R_2) \in \mathbb{R}_2^+ : \\ R_1 + R_2 \leq C\left(\frac{P_1+P_2+2\sqrt{P_1P_2}}{\sigma_s^2}\right) \end{array} \right\}, \tag{82}$$

whereas if the state is only known strictly causally at encoder 1, the capacity region $\mathcal{C}^{snf}$ is given by (58), see also [16].

We plot a instance of these three capacity regions by setting $P_1 = P_2 = 2$ and $\sigma_s^2 = 1$ in Fig. 3. As we observe, $\mathcal{C}^{snf} \subset \mathcal{C}^{sf} \subset \mathcal{C}^{ss}$. By comparison, it can be seen that feedback allows to reap some of the benefits that come from cooperation on the transmission of the state sequence, since encoder 2 can learn the state information via feedback. $\square$

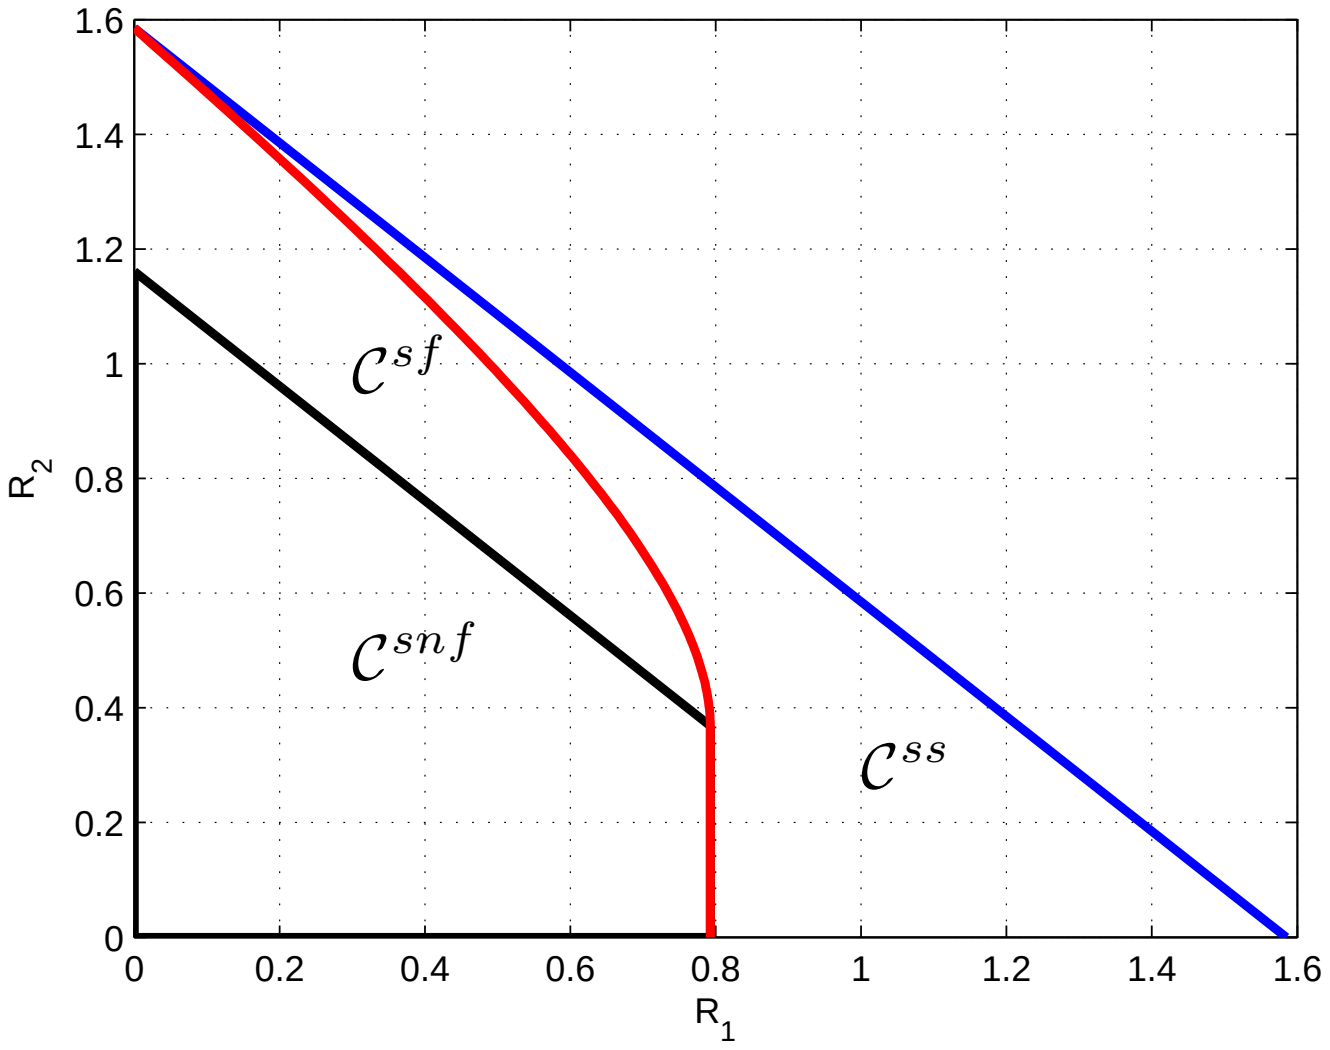

Fig. 3. Comparison of different capacity regions

Remark 13: Consider a forth case where there is no state information at encoder 1 but output feedback is available to encoder 2. While the capacity of the case is unknown in general, it can be seen that $R_2 \leq C\left(\frac{P_2}{\sigma_s^2}\right)$. This is because the capacity of user 2 cannot be improved via feedback. Therefore, the capacity region of this case is strictly smaller than the case where the state is known at encoder 1, i.e., $\mathcal{C}^{sf}$. This demonstrates the importance of strictly causal side information at encoder 1 in order to fully realize the advantages of output feedback available to encoder 2. $\square$

Now we provide the proof of the capacity region $\mathcal{C}^{sf}$.

Sketch of Proof:

Achievability:

The key idea of the achievable scheme is based on the extended Schalkwijk-Kailath feedback coding, see [18], [28]. User 1 divides its power into two parts. It consumes fraction α $(0 \leq \alpha \leq 1)$ of its power to send its message w_1 over n channel uses using a codeword drawn from a codebook whose entries are generated in an i.i.d. fashion from a zero-mean Gaussian distribution with variance αP_1. It uses the remaining portion $(1-\alpha)P_1$ to help user 2 transmit state information via feedback coding.

Specifically, we have the following:

Codebook Generation: Randomly generate 2^{nR_1} i.i.d. sequences x_{1p}^n with $x_{1pi} \sim \mathcal{N}(0, \alpha P_1)$. Index them by $x_{1p}^n(w_1)$ with $w_1 \in \left[1 : 2^{nR_1}\right]$. Partition $[-1 : 1]$ into 2^{nR_2} small intervals of equal length and map messages $w_2 \in \left[1 : 2^{nR_2}\right]$ to the middle points of these intervals. Index them by $\theta(w_2)$.

Encoding:

1) First channel use $(i = 1)$: To send a message pair (w_1, w_2), user 1 sends out the first component $x_{1p,1}(w_1)$ of $x_{1p}^n(w_1)$ while user 2 sends out $\theta(w_2)$. By feedback, user 2 learns a noisy state $s_1' = s_1 + x_{1p,1}(w_1)$ after subtracting its own information. User 1 instead knows $x_{1p,1}(w_1)$ and s_1 as well by our assumption so that it can form the same noisy state s_1'. Hence user 1 and 2 fully cooperate to convey this information to the receiver in next channel use.
2) Other channel uses $(i \geq 2)$: Let $s_{i-1}' = s_{i-1} + x_{1p,i-1}(w_1)$; user 1 forms $x_{1i} = x_{1p,i}(w_1) + \gamma_{1i}s_{i-1}'$ with $\gamma_{1i}s_{i-1}' \sim \mathcal{N}(0, (1-\alpha)P_1)$, while user 2 forms $x_{2i} = \gamma_{2i}s_{i-1}'$, with $\gamma_{2i}s_{i-1}' \sim \mathcal{N}(0, P_2)$; then x_{1i} and x_{2i} are sent out over channel use i.

Decoding: After n channel uses, the receiver first estimates $\hat{s}_1' = \mathbb{E}[s_1' | y^n]$; then, $\theta(\hat{w}_2) = y_1 - \hat{s}_1' = \theta(w_2) + (s_1' - \mathbb{E}[s_1' | y^n])$. After decoding w_2, subtracting it from the received signal, w_1 is decoded.

Analysis of Probability of Error: We note that using the union bound, we have, $\Pr(E) \leq \Pr(E_2) + \Pr(E_1 | E_2^c)$, where the first term corresponds to the probability of decoding error of w_2, and the second term is the probability of decoding error of w_1 given w_2 is correctly decoded.

The probability of decoding error $\Pr(E_2)$ vanishes as the variance of estimation error of s_1'

goes arbitrarily small as $n \to \infty$. Similar to [18], it can be shown that $\Pr\left(E_2\right) \to 0$ as long as

$$R_2 \leq C\left(\frac{(1-\alpha)\,P_1 + P_2 + 2\sqrt{(1-\alpha)\,P_1P_2}}{\sigma_s^2 + \alpha P_1}\right) \tag{83}$$

for sufficiently large n.

After decoding w_2, canceling it, we have $\Pr\left(E_1\left|E_2^c\right.\right) \to 0$ as long as:

$$R_1 \leq C\left(\frac{\alpha P_1}{\sigma_s^2}\right) \tag{84}$$

for sufficiently large n. Setting $\alpha \triangleq (1-\rho^2)$, we have:

$$C\left(\frac{(1-\alpha)\,P_1 + P_2 + 2\sqrt{(1-\alpha)\,P_1P_2}}{\sigma_s^2 + \alpha P_1}\right) + C\left(\frac{\alpha P_1}{\sigma_s^2}\right) \tag{85}$$

$$= C\left(\frac{P_1 + P_2 + 2\rho\sqrt{P_1P_2}}{\sigma_s^2}\right) \tag{86}$$

Hence any non-negative rate pair (R_1, R_2) that satisfies the following constraints simultaneously is achievable:

$$R_1 \leq C\left(\frac{(1-\rho^2)\,P_1}{\sigma_s^2}\right), \tag{87}$$

$$R_1 + R_2 \leq C\left(\frac{P_1 + P_2 + 2\rho\sqrt{P_1P_2}}{\sigma_s^2}\right) \tag{88}$$

for all $0 \leq \rho \leq 1$.

Converse:

Providing message w_2 to encoder 1, the channel becomes the MAC studied in [29] where encoder 1 knows both w_1 and w_2, encoder 2 knows w_2 and output feedback is available at the encoders. In fact, the state sequence at encoder 1 in this genie-aided model can be seen as equivalent to feedback, since via feedback, encoder 1 effectively obtains s^{i-1}. It is shown in [29] that feedback does not increase capacity and thus the capacity region is given by (81). ■

VIII. CONCLUSION

In this work, we have investigated whether states causally known at transmitters in multiple access channels is beneficial to achieve larger rates. To answer this question, we first revisited a two-user MAC studied in [16] and derived a new achievable rate region based on simple encoding at the transmitter and a decoding strategy similar to noisy network coding. The new region turns out to be potentially larger than that in [16]. The capacity result for the Gaussian model of

[16] for the special case of a single state sequence is generalized to a larger class of channels that includes modulo-additive state-dependent MACs. Next, we generalized the proposed scheme to an arbitrary number of users case and established the achievable rate region for a class of state-dependent M-user MACs. Based on a similar strategy, we also established the achievable rate region for M-user MACs with common state. In the end, we introduced output feedback in the model at hand with independent states and gave an example to show the benefits of feedback in enlarging capacity region for a state-dependent channel model. We find that output feedback allows state correlation and cooperation besides message cooperation in a multiple-user state-dependent channel. As future work, it will be interesting to investigate the impact of output feedback for the state-dependent MAC in general. Another direction interesting is to study some other multi-user state-dependent channels, e.g., state-dependent interference channels, to see whether we can obtain the benefits of causal state information demonstrated in this work or not.

APPENDIX A
PROOF OF THEOREM 5

Consider b blocks of transmission and assume the same message vector $\mathbf{w} = (w_1, ..., w_M)$ is transmitted over all the blocks.

- **Codebook Generation**:
  Fix $P_{V_1,...,V_M,S_1,...,S_M,X_1,...,X_M,Y} = \prod_{k=1}^{M} \left(P_{V_k|S_k,X_k} P_{S_k} P_{X_k}\right) P_{Y|S_1,...,S_M,X_1,...,X_M}$ and $\mathbb{E}\left[c_k\left(X_k\right)\right] \leq \beta_k, (k = 1, ..., M)$ for any given cost tuple $(\beta_1, ..., \beta_M)$.
  1) For each block j, $j \in [1:b]$, randomly and independently generate $2^{nbR_k} \times 2^{nR_{kv}}$ i.i.d. sequences x_{kj}^n according to $P\left(x_{kj}^n\right) = \prod_{i=1}^{n} P\left(x_{kj,i}\right)$. Index them as $x_{kj}^n\left(w_k, t_{k,j-1}\right)$, with $w_k \in \left[1:2^{nbR_k}\right]$ and $t_{k,j-1} \in \left[1:2^{nR_{kv}}\right]$, $k = 1, 2, ..., M$.
  2) For each block j, $j \in [1:b]$, for each $x_{kj}^n\left(w_k, t_{k,j-1}\right)$, randomly and independently generate $2^{nR_{kv}}$ i.i.d. sequences v_{kj}^n according to the conditional probability mass function (pmf) $P\left(v_{kj}^n \left|x_{kj}^n\right.\right) = \prod_{i=1}^{n} P\left(v_{kj,i} \left|x_{kj,i}\right.\right)$ for each fixed $P\left(v_{kj}^n \left|x_{kj}^n, s_{kj}^n\right.\right)$. Index them as $v_{kj}^n\left(t_{kj} \left|w_k, t_{k,j-1}\right.\right)$, with $t_{kj} \in \left[1:2^{nR_{kv}}\right]$, $k = 1, 2, ..., M$.
- **Encoding**:
  For $j = 1$: $x_{k1}^n\left(w_k, 1\right)$ is sent out by each transmitter, $k = 1, 2, ..., M$.

For $j \in [2:b]$: At the end of $(j-1)$th block transmission, the encoders learn the entire state sequence $s_{1,j-1}^n$ and $s_{2,j-1}^n$ respectively. Each encoder looks for an index (compression index) $t_{k,j-1}$ such that $\left(s_{k,j-1}^n, v_{k,j-1}^n\left(t_{k,j-1}\left|w_k, t_{k,j-2}\right.\right), x_{k,j-1}^n\left(w_k, t_{k,j-2}\right)\right) \in A_\epsilon^n$. If more than one indices are found, choose the smallest one. If there is no such an index, choose an arbitrary index at random from $\left[1:2^{nR_{kv}}\right]$. Thus the codeword $x_{kj}^n\left(w_k, t_{k,j-1}\right)$ is sent out at each transmitter for the next block, i.e., the jth block.

- **Decoding**:

  After b blocks of transmission, the decoder looks for a message vector $\hat{\mathbf{w}} = [\hat{w}_1, \hat{w}_2, ..., \hat{w}_M]$ over the Cartesian product $\left[1:2^{nbR_1}\right] \times \left[1:2^{nbR_2}\right] ... \times \left[1:2^{nbR_M}\right]$ such that:

$$\left(\mathbf{x}_j^n\left(\hat{\mathbf{w}}, \mathbf{t}_{j-1}\right), \mathbf{v}_j^n\left(\mathbf{t}_j\left|\hat{\mathbf{w}}, \mathbf{t}_{j-1}\right.\right), y_j^n\right) \in A_\epsilon^n \tag{89}$$

  for $j \in [1:b]$ and some $\mathbf{t}^b = \left(\mathbf{t}_1^b, \mathbf{t}_2^b, ..., \mathbf{t}_M^b\right) = (t_{11}, ..., t_{1b}, ..., t_{M1}, ..., t_{Mb})$.

- **Probability of Error Analysis**:

  To bound the probability of error $\Pr(E)$, without loss of generality, assume $\mathbf{w} = \mathbf{1}_M$ are sent out and let $T_{kj} = 1$ be the compression index chosen by encoder k for each block j. Define the following encoding events:

$$E_0 = \bigcup_{k=1}^{M} E_{0k} \tag{90}$$

  with each

$$E_{0k} = \bigcup_{j=1}^{b} \left\{\left(s_{kj}^n, v_{kj}^n\left(t_{kj}\left|1, T_{k,j-1}\right.\right), x_{kj}^n\left(1, T_{k,j-1}\right)\right) \notin A_\epsilon^n, \forall t_{kj}\right\} \tag{91}$$

  Define the following decoding events:

$$\begin{aligned} E_{\mathbf{w}} &= \left\{\left(\mathbf{x}^n\left(\mathbf{w}, \mathbf{t}_{j-1}\right), \mathbf{v}^n\left(\mathbf{t}_j\left|\mathbf{w}, \mathbf{t}_{j-1}\right.\right), y_j^n\right) \in A_\epsilon^n\right\} \\ &\triangleq \left\{A_j\left(\mathbf{w}, \mathbf{t}_j, \mathbf{t}_{j-1}\right)\right\} \end{aligned} \tag{92}$$

  for $j \in [1:b]$ and some $\mathbf{t}^b = \left(\mathbf{t}_1^b, \mathbf{t}_2^b, ..., \mathbf{t}_M^b\right) = (t_{11}, ..., t_{1b}, ..., t_{M1}, ..., t_{Mb})$.

  Thus by the union bound,

$$\Pr(E) \le \sum_{k=1}^{M} \Pr\left(E_{0k}\right) + \Pr\left(E_{\mathbf{1}_M}^c \cap E_0^c\right) + \Pr\left(\bigcup_{\mathbf{w} \ne \mathbf{1}_M} E_{\mathbf{w}}\right) \tag{93}$$

$$\le \sum_{k=1}^{M} \Pr\left(E_{0k}\right) + \Pr\left(E_{\mathbf{1}_M}^c \cap E_0^c\right) + \sum_{\mathbf{w} \ne \mathbf{1}_M} \Pr\left(E_{\mathbf{w}}\right) \tag{94}$$

1) By the covering lemma [22], it can be shown that $\Pr\left(E_{0k}\right) \to 0$ as long as

$$R_{kv} > I\left(S_k; V_k \left| X_k \right.\right) \tag{95}$$

for sufficiently large n.

2) Assume R_{kv} satisfies the above bound, $k = 1, ..., M$. By the conditional joint typicality lemma [22], $\Pr\left(E_{\mathbf{1}_M}^c \cap E_0^c\right) \to 0$ for sufficiently large n.

3) Focus on $\sum\limits_{\mathbf{w} \neq \mathbf{1}_M} \Pr\left(E_{\mathbf{w}}\right)$:

To facilitate analysis, for each $\mathbf{t}^b$ and $j \in [2:b]$, first define two sets:

$$\mathcal{S}_j\left(\mathbf{w}, \mathbf{t}_{j-1}\right) \subseteq [1:M] \tag{96}$$

such that $\mathcal{S}_j\left(\mathbf{w}, \mathbf{t}_{j-1}\right) = \{k : (w_k \neq 1) \bigcup (t_{k,j-1} \neq 1)\}$,

and

$$\mathcal{T}_j\left(\mathbf{w}, \mathbf{t}_{j-1}\right) \subseteq [1:M] \tag{97}$$

such that $\mathcal{T}_j\left(\mathbf{w}, \mathbf{t}_{j-1}\right) = \{k : w_k \neq 1\}$.

Hence $\mathcal{T}_j \subseteq \mathcal{S}_j$.

Also define a third set $\tilde{\mathcal{S}}_j\left(\mathbf{w}, \mathbf{t}_{j-1}\right)$ such that $\tilde{\mathcal{S}}_j\left(\mathbf{w}, \mathbf{t}_{j-1}\right) = \left\{k : \mathbf{t}_j \neq 1, k \in \mathcal{S}_j^c\left(\mathbf{w}, \mathbf{t}_{j-1}\right)\right\}$.

Therefore, $\tilde{\mathcal{S}}_j \subseteq \mathcal{S}_j^c$ and $\tilde{\mathcal{S}}_j \cup \tilde{\mathcal{S}}_j^c = \mathcal{S}_j^c$.

Now we have the fact that:

$\left(\mathbf{x^n}\left(\mathcal{S}_j\left(\mathbf{w}, \mathbf{t}_{j-1}\right)\right), \mathbf{v^n}\left(\mathcal{S}_j\left(\mathbf{w}, \mathbf{t}_{j-1}\right)\right), \mathbf{v^n}\left(\tilde{\mathcal{S}}_j\left(\mathbf{w}, \mathbf{t}_{j-1}\right)\right)\right)$ are always independent of $\left(\mathbf{x^n}\left(\mathcal{S}_j^c\left(\mathbf{w}, \mathbf{t}_{j-1}\right)\right), \mathbf{v^n}\left(\tilde{\mathcal{S}}_j^c\left(\mathbf{w}, \mathbf{t}_{j-1}\right)\right), y_j^n\right)$.

For any fixed $(\mathbf{w}, \mathcal{S}_j)$, by the standard argument on joint typicality [23, Theorem 15.2.1], we obtain:

$$\Pr\left(A_j\left(\mathbf{w}, \mathbf{t}_j, \mathbf{t}_{j-1}\right)\right) \tag{98}$$

$$\leq 2^{-n\left(I\left(X(\mathcal{S}_j), V(\mathcal{S}_j), V\left(\tilde{\mathcal{S}}_j\right); X\left(\mathcal{S}_j^c\right), V\left(\tilde{\mathcal{S}}_j^c\right), Y\right) - \epsilon\right)} \tag{99}$$

$$= 2^{-n\left(I\left(X(\mathcal{S}_j), V(\mathcal{S}_j); X\left(\mathcal{S}_j^c\right), V\left(\tilde{\mathcal{S}}_j^c\right), Y \middle| V\left(\tilde{\mathcal{S}}_j\right)\right) + I\left(V\left(\tilde{\mathcal{S}}_j\right); X\left(\mathcal{S}_j^c\right), V\left(\tilde{\mathcal{S}}_j^c\right), Y\right) - \epsilon\right)} \tag{100}$$

$$\leq 2^{-n\left(I\left(X(\mathcal{S}_j), V(\mathcal{S}_j); X\left(\mathcal{S}_j^c\right), V\left(\tilde{\mathcal{S}}_j^c\right), Y \middle| V\left(\tilde{\mathcal{S}}_j\right)\right) - \epsilon\right)} \tag{101}$$

$$= 2^{-n\left(I\left(X(\mathcal{S}_j), V(\mathcal{S}_j); Y \middle| X\left(\mathcal{S}_j^c\right), V\left(\tilde{\mathcal{S}}_j^c\right), V\left(\tilde{\mathcal{S}}_j\right)\right) - \epsilon\right)} \tag{102}$$

$$= 2^{-n\left(I\left(X(\mathcal{S}_j), V(\mathcal{S}_j); Y \middle| X\left(\mathcal{S}_j^c\right), V\left(\mathcal{S}_j^c\right)\right) - \epsilon\right)} \tag{103}$$

$$\triangleq \Pr\left(A_j^{upper}\left(\mathbf{w}, \mathbf{t}_{j-1}\right)\right) \tag{104}$$

for arbitrary $\epsilon > 0$ and sufficiently large n, where (101) follows from the non-negativity of mutual information, (102) follows from the independence fact mentioned above and finally (103) follows from the definition of $\tilde{\mathcal{S}}_j\left(\mathbf{w}, \mathbf{t}_{j-1}\right)$.

Notice that the upper bound (103) is dependent of $\mathbf{t}_{j-1}$ only and independent of $\mathbf{t}_j$ for any fixed $\mathbf{w}$.

Therefore,

$$\sum_{\mathbf{w}\neq\mathbf{1}_M} \Pr\left(E_{\mathbf{w}}\right) \tag{105}$$

$$= \sum_{\mathbf{w}\neq\mathbf{1}_M} \Pr\left(\bigcup_{\mathbf{t}^b}\bigcap_{j=1}^{b} A_j\left(\mathbf{w}, \mathbf{t}_j, \mathbf{t}_{j-1}\right)\right) \tag{106}$$

$$\leq \sum_{\mathbf{w}\neq\mathbf{1}_M} \sum_{\mathbf{t}^b} \Pr\left(\bigcap_{j=1}^{b} A_j\left(\mathbf{w}, \mathbf{t}_j, \mathbf{t}_{j-1}\right)\right) \tag{107}$$

$$\leq \sum_{\mathbf{w}\neq\mathbf{1}_M} \sum_{\mathbf{t}^b} \prod_{j=2}^{b} \Pr\left(A_j\left(\mathbf{w}, \mathbf{t}_j, \mathbf{t}_{j-1}\right)\right) \tag{108}$$

$$= \sum_{\mathbf{w}\neq\mathbf{1}_M} \sum_{\mathbf{t}_b} \sum_{\mathbf{t}^{b-1}} \prod_{j=2}^{b} \Pr\left(A_j\left(\mathbf{w}, \mathbf{t}_j, \mathbf{t}_{j-1}\right)\right) \tag{109}$$

$$\leq \sum_{\mathbf{w}\neq\mathbf{1}_M} \sum_{\mathbf{t}_b} \sum_{\mathbf{t}^{b-1}} \prod_{j=2}^{b} \Pr\left(A_j^{upper}\left(\mathbf{w}, \mathbf{t}_{j-1}\right)\right) \tag{110}$$

$$= \sum_{\mathbf{w}\neq\mathbf{1}_M} \sum_{\mathbf{t}_b} \prod_{j=2}^{b} \sum_{\mathbf{t}_{j-1}} \Pr\left(A_j^{upper}\left(\mathbf{w}, \mathbf{t}_{j-1}\right)\right) \tag{111}$$

$$\leq \sum_{\substack{\mathcal{T}(\mathbf{w})\subseteq[1:M]\\ \mathcal{T}(\mathbf{w})\neq\emptyset}} 2^{nb\sum\limits_{k\in\mathcal{T}} R_k}\, 2^{\sum\limits_{k\in[1:M]} nR_{kv}} \left(\sum_{\substack{\mathcal{S}\subseteq[1:M]\\ T(\mathbf{w})\subseteq\mathcal{S}}} \sum_{\mathbf{t}_{j-1}:\mathcal{S}_j(\mathbf{w},\mathbf{t}_{j-1})=\mathcal{S}} 2^{-n\left(\mathbf{I}_{(\mathbf{w},\mathcal{S})}-\epsilon\right)}\right)^{b-1} \tag{112}$$

$$\leq \sum_{\substack{\mathcal{T}(\mathbf{w})\subseteq[1:M]\\ \mathcal{T}(\mathbf{w})\neq\emptyset}} 2^{nb\sum\limits_{k\in\mathcal{T}} R_k}\, 2^{\sum\limits_{k\in[1:M]} nR_{kv}}\, 2^{(b-1)(M-1)} 2^{-(b-1)n(\mathbf{I}_{\min}-\epsilon)} \tag{113}$$

with

$$\mathbf{I}_{(\mathbf{w},\mathcal{S})} = I\left(X\left(\mathcal{S}\right), V\left(\mathcal{S}\right); Y \left| X\left(\mathcal{S}^c\right), V\left(\mathcal{S}^c\right)\right.\right) \tag{114}$$

and

$$\mathbf{I}_{\min} = \min_{\substack{\mathcal{S}\subseteq[1:M]\\ \mathcal{T}(\mathbf{w})\subseteq\mathcal{S}}} \left(\mathbf{I}_{(\mathbf{w},\mathcal{S})} - \sum_{k\in\mathcal{S}} R_{kv} \right) \tag{115}$$

where (107) holds by the union bound; (108) holds due to the independence of codebook for each block, the memoryless property of the channel and the fact that $0 \le \Pr(A_j) \le 1$; (110) and (112) follow from (104); (111) follows from the fact that $\Pr\left(A_j^{upper}(\mathbf{w},\mathbf{t}_{j-1})\right)$ is dependent of $\mathbf{t}_{j-1}$ only given $\mathbf{w}$.

Finally $\sum\limits_{\mathbf{w}\neq\mathbf{1}_M} \Pr(E_{\mathbf{w}}) \to 0$ as long as:

$$\begin{aligned} &\forall\, \mathcal{T} \subseteq [1:M]\,, \\ &nb\sum_{k\in\mathcal{T}} R_k + \sum_{k\in[1:M]} nR_{kv} + (b-1)(M-1) < (b-1)\,n\,(\mathbf{I}_{\min} - \epsilon) \end{aligned} \tag{116}$$

i.e.,

$$\begin{aligned} &\forall\, \mathcal{T} \subseteq [1:M]\,, \\ &\sum_{k\in\mathcal{T}} R_k < \frac{(b-1)}{b}(\mathbf{I}_{\min} - \epsilon) - \frac{\sum\limits_{k\in[1:M]} R_{kv}}{b} - \frac{(b-1)(M-1)}{nb} \end{aligned} \tag{117}$$

Setting $b \to \infty$ and $n \to \infty$,

$$\sum_{k\in\mathcal{T}} R_k < \mathbf{I}_{\min} \tag{118}$$

$$= \min_{\substack{\mathcal{S}\subseteq[1:M]\\ \mathcal{T}\subseteq\mathcal{S}}} \left(I\left(X(\mathcal{S}), V(\mathcal{S}); Y\,|X(\mathcal{S}^c), V(\mathcal{S}^c)\right) - \sum_{k\in\mathcal{S}} R_{kv} \right) \tag{119}$$

$$\le \min_{\substack{\mathcal{S}\subseteq[1:M]\\ \mathcal{T}\subseteq\mathcal{S}}} \left(I\left(X(\mathcal{S}), V(\mathcal{S}); Y\,|X(\mathcal{S}^c), V(\mathcal{S}^c)\right) - \sum_{k\in\mathcal{S}} I\left(V_k; S_k\,|X_k\right) \right) \tag{120}$$

Going over all $\mathcal{T} \subseteq [1:M]$, we establish the achievable rate region $\mathcal{R}_{in}^M(\beta_1, ..., \beta_M)$ given in (69). Furthermore, exploiting time-sharing among different cost constraints, we establish the $\mathbf{\Gamma}$-achievable rate region.

APPENDIX B

PROOF OF THEOREM 6

Consider b blocks of transmission and assume the same message vector $\mathbf{w} = (w_1, ..., w_M)$ is transmitted over all the blocks.

- **Codebook Generation**:

  Fix $P_{V,S,U,X_1,...,X_M,Y} = P_S P_{V|S} P_U \left(\prod_{k=1}^{M} P_{X_k|U} \right) P_{Y|S,X_1,...,X_M}$ and $\mathbb{E}\left[c_k\left(X_k\right)\right] \le \beta_k, (k = 1, ..., M)$ for any given cost tuple $(\beta_1, ..., \beta_M)$.

  1) For each block j, $j \in [1:b]$, randomly and independently generate 2^{nR_v} i.i.d. sequences v_j^n according to the marginal pmf $P\left(v_j^n\right) = \prod_{i=1}^{n} P\left(v_{j,i}\right)$ for each fixed $P\left(v_j^n \left| s_j^n \right.\right)$. Index them as $v_j^n\left(t_j\right)$, with $t_j \in \left[1:2^{nR_v}\right]$.
  2) For each block j, $j \in [1:b]$, randomly and independently generate 2^{nR_v} i.i.d. sequences u_j^n according to $P\left(u_j^n\right) = \prod_{i=1}^{n} P\left(u_{j,i}\right)$. Index them as $u_j^n\left(t_{j-1}\right)$, with $t_{j-1} \in \left[1:2^{nR_v}\right]$.
  3) For each block j, for each $u_j^n\left(t_{j-1}\right)$, randomly and independently generate 2^{nbR_k} i.i.d. sequences x_{kj}^n according to the conditional pmf $P\left(x_{kj}^n \left| u_j^n\left(t_{j-1}\right)\right.\right) = \prod_{i=1}^{n} P\left(x_{kj,i} \left| u_{j,i}\left(t_{j-1}\right)\right.\right)$. Index them as $x_{kj}^n\left(w_k \left| t_{j-1}\right.\right)$, with $w_k \in \left[1:2^{nbR_k}\right]$, for $k = 1, 2, ..., M$.

- **Encoding**:

  For $j = 1$: $x_{k1}^n\left(w_k \left| 1\right.\right)$ is sent out by each transmitter, $k = 1, 2, ..., M$.

  For $j \in [2:b]$: At the end of $(j-1)$th block transmission, all encoders learn the entire common state sequence s_{j-1}^n. They look for an index (compression index) t_{j-1} through the common codebook such that $\left(s_{j-1}^n, v_{j-1}^n\left(t_{j-1}\right)\right) \in A_\epsilon^n$. If more than one indices are found, choose the smallest one. If there is no such an index, choose *the first index*. Thus the codeword $x_{kj}^n\left(w_k \left| t_{j-1}\right.\right)$ is sent out at each transmitter for the next block, i.e., the jth block.

- **Decoding**:

  After b blocks of transmission, the decoder looks for a message vector $\hat{\mathbf{w}} = [\hat{w}_1, \hat{w}_2, ..., \hat{w}_M]$ over the Cartesian product $\left[1:2^{nbR_1}\right] \times \left[1:2^{nbR_2}\right] ... \times \left[1:2^{nbR_M}\right]$ such that:

  $$\left(\mathbf{x}^n\left(\hat{\mathbf{w}} \left| t_{j-1}\right.\right), u_j^n\left(t_{j-1}\right), v_j^n\left(t_j\right), y_j^n\right) \in A_\epsilon^n \tag{121}$$

  for $j \in [1:b]$ and some $\mathbf{t}^b = (t_1, t_2, ..., t_b)$.

- **Probability of Error Analysis**:

  To bound the probability of error $\Pr(E)$, without loss of generality, assume $\mathbf{w} = \mathbf{1}_M$ are sent out and let $T_j = 1$ be the common compression index chosen for each block j.

  Define the following encoding events:

  $$E_0 = \bigcup_{j=1}^{b} \left\{ \left(s_j^n, v_j^n\left(t_j\right)\right) \notin A_\epsilon^n, \forall t_j \right\} \tag{122}$$

Define the following decoding events:

$$E_{\mathbf{w}}=\left\{\left(\mathbf{x}^n\left(\mathbf{w}\left|t_{j-1}\right.\right),u_j^n\left(t_{j-1}\right),v_j^n\left(t_j\right),y_j^n\right)\in A_\epsilon^n\right\} \tag{123}$$

$$\triangleq\left\{A_j\left(\mathbf{w},t_j,t_{j-1}\right)\right\} \tag{124}$$

for $j\in[1:b]$ and some $\mathbf{t}^b=(t_1,t_2,...,t_b)$.

Thus by the union bound,

$$\Pr\left(E\right)\le\Pr\left(E_0\right)+\Pr\left(E_{\mathbf{1}_M}^c\cap E_0^c\right)+\Pr\left(\bigcup_{\mathbf{w}\ne\mathbf{1}_M}E_{\mathbf{w}}\right) \tag{125}$$

$$\le\Pr\left(E_0\right)+\Pr\left(E_{\mathbf{1}_M}^c\cap E_0^c\right)+\sum_{\mathbf{w}\ne\mathbf{1}_M}\Pr\left(E_{\mathbf{w}}\right) \tag{126}$$

1) By the covering lemma [22], it can be shown that $\Pr\left(E_0\right)\to0$ as long as

$$R_v>I\left(S;V\right) \tag{127}$$

for sufficiently large n.

2) Assume R_v satisfies the above bound. By the conditional joint typicality lemma [22], $\Pr\left(E_{\mathbf{1}_M}^c\cap E_0^c\right)\to0$ for sufficiently large n.

3) Focus on $\sum\limits_{\mathbf{w}\ne\mathbf{1}_M}\Pr\left(E_{\mathbf{w}}\right)$:

To bound this term as tight as possible, we define another event for each block here,

$$B_j\left(t_{j-1}\right)\triangleq\left\{\left(v_{j-1}^n\left(t_{j-1}\right),y_{j-1}^n\right)\in A_\epsilon^n\right\} \tag{128}$$

Notice that $A_{j-1}\subseteq B_{j-1}$, hence:

$$\sum_{\mathbf{w}\ne\mathbf{1}_M}\Pr\left(E_{\mathbf{w}}\right) \tag{129}$$

$$=\sum_{\mathbf{w}\ne\mathbf{1}_M}\Pr\left(\bigcup_{\mathbf{t}^b}\bigcap_{j=1}^{b}A_j\left(\mathbf{w},t_j,t_{j-1}\right)\right) \tag{130}$$

$$\le\sum_{\mathbf{w}\ne\mathbf{1}_M}\sum_{\mathbf{t}^b}\Pr\left(\bigcap_{j=1}^{b}A_j\left(\mathbf{w},t_j,t_{j-1}\right)\right) \tag{131}$$

$$=\sum_{\mathbf{w}\ne\mathbf{1}_M}\sum_{\mathbf{t}^b}\Pr\left(\left(\bigcap_{j=1}^{b}A_j\left(\mathbf{w},t_j,t_{j-1}\right)\right)\cap\left(\bigcap_{j=2}^{b}B_{j-1}\left(t_{j-1}\right)\right)\right) \tag{132}$$

$$\le\sum_{\mathbf{w}\ne\mathbf{1}_M}\sum_{\mathbf{t}^b}\Pr\left(\bigcap_{j=2}^{b}\left(A_j\left(\mathbf{w},t_j,t_{j-1}\right)\cap B_{j-1}\left(t_{j-1}\right)\right)\right) \tag{133}$$

$$\leq \sum_{\mathbf{w}\neq\mathbf{1}_M} \sum_{\mathbf{t}^b} \prod_{j=2}^{b-1} \Pr\left(A_j\left(\mathbf{w}, t_j, t_{j-1}\right) \cap B_{j-1}\left(t_{j-1}\right) | B_j\left(t_j\right)\right) \tag{134}$$

where (131) holds by the union bound; (132) holds by the fact that $A_{j-1} \subseteq B_{j-1}$; (133) follows from $0 \leq \Pr\left(A_j\right) \leq 1$, and (134) follows from the chain rule and again exploits the fact that $A_{j-1} \subseteq B_{j-1}$.

Define sets $\mathcal{S}_j\left(\mathbf{w}\right) \subseteq [1:M]$ such that $\mathcal{S}_j\left(\mathbf{w}\right) = \{k : w_k \neq 1\}$ for each block j. We have the following lemma, which upper bound each probability term in (134).

Lemma 1: For any fixed $(\mathbf{w}, \mathcal{S}_j(\mathbf{w}))$, we have:

$$\begin{aligned}
&\Pr\left(A_j\left(\mathbf{w}, t_j, t_{j-1}\right) \cap B_{j-1}\left(t_{j-1}\right) | B_j\left(t_j\right)\right) \\
&\leq \begin{cases} \frac{1}{1-\epsilon'} 2^{-n(I(\mathbf{X}([1:M]),V;Y)-2\epsilon-\epsilon')}, & \forall\ \ t_{j-1} \neq 1 \\ \frac{1}{1-\epsilon'} 2^{-n\left(I\left(\mathbf{X}(\mathcal{S}_j(\mathbf{w}));Y\middle|U,V,\mathbf{X}\left(\mathcal{S}_j^c(\mathbf{w})\right)\right)-\epsilon-\epsilon'\right)}, & t_{j-1} = 1 \end{cases} && (135) \\
&\triangleq \Pr\left(A_j^{upper}\left(\mathbf{w}, t_{j-1}\right)\right) && (136)
\end{aligned}$$

where the upper bound is independent of t_j, for arbitrary $\epsilon, \epsilon' > 0$ and sufficiently large n.

Proof:

The proof of this lemma follows from the standard argument on joint typicality [23, Theorem 15.2.1] and is deferred to Appendix C. ■

Thus we have,

$$\begin{aligned}
&\sum_{\mathbf{w}\neq\mathbf{1}_M} \Pr\left(E_{\mathbf{w}}\right) && (137) \\
&\leq \sum_{\mathbf{w}\neq\mathbf{1}_M} \sum_{\mathbf{t}^b} \prod_{j=2}^{b-1} \Pr\left(A_j\left(\mathbf{w}, t_j, t_{j-1}\right) \cap B_{j-1}\left(t_{j-1}\right) | B_j\left(t_j\right)\right) && (138) \\
&\leq \sum_{\mathbf{w}\neq\mathbf{1}_M} \sum_{\mathbf{t}^b} \prod_{j=2}^{b-1} \Pr\left(A_j^{upper}\left(\mathbf{w}, t_{j-1}\right)\right) && (139) \\
&= \sum_{\mathbf{w}\neq\mathbf{1}_M} \sum_{t_b, t_{b-1}} \prod_{j=2}^{b-1} \sum_{t_{j-1}} \Pr\left(A_j^{upper}\left(\mathbf{w}, t_{j-1}\right)\right) && (140) \\
&\leq \sum_{\substack{\mathcal{S}(\mathbf{w})\subseteq[1:M], \\ \mathcal{S}(\mathbf{w})\neq\emptyset}} 2^{nb\sum\limits_{k\in\mathcal{S}(\mathbf{w})} R_k} 2^{2nR_v} \left(\frac{1}{1-\epsilon'} 2 \times 2^{-n(\min(\mathbf{I}_{m1}, \mathbf{I}_{m2}))}\right)^{b-2} && (141)
\end{aligned}$$

with

$$\mathbf{I}_{m1} = I\left(\mathbf{X}\left([1:M]\right), V; Y\right) - R_v - 2\epsilon - \epsilon', \tag{142}$$

$$\mathbf{I}_{m2} = I\left(\mathbf{X}\left(\mathcal{S}\left(\mathbf{w}\right)\right); Y\left|U, V, \mathbf{X}\left(\mathcal{S}^c\left(\mathbf{w}\right)\right)\right.\right) - \epsilon - \epsilon' \tag{143}$$

for arbitrary $\epsilon, \epsilon' > 0$ and sufficiently large n, where (139) and (141) follows from Lemma 1, and (140) holds because $\Pr\left(A_j^{upper}\left(\mathbf{w}, t_{j-1}\right)\right)$ is dependent of t_{j-1} only for any fixed $\mathbf{w}$.

Setting $b \to \infty$ and $n \to \infty$, $\sum\limits_{\mathbf{w} \neq \mathbf{1}_M} \Pr\left(E_{\mathbf{w}}\right) \to 0$ as long as:

$$\sum_{k \in \mathcal{S}} R_k < \min\left(\mathbf{I}_{m1}, \mathbf{I}_{m2}\right), \forall\ \mathcal{S} \subseteq [1:M] \tag{144}$$

Note that $\mathbf{I}_{m1}$ is not dependent of $\mathcal{S}(\mathbf{w})$ and thus we only need to keep:

$$\sum_{k \in [1:M]} R_k < I\left(\mathbf{X}\left([1:M]\right), V; Y\right) - R_v \tag{145}$$

$$< I\left(\mathbf{X}\left([1:M]\right), V; Y\right) - I\left(V; S\right) \tag{146}$$

and

$$\sum_{k \in \mathcal{S}} R_k < I\left(\mathbf{X}\left(\mathcal{S}\right); Y\left|U, V, \mathbf{X}\left(\mathcal{S}^c\right)\right.\right), \tag{147}$$

$$\forall \mathcal{S} \subseteq [1:M] \tag{148}$$

which establishes the achievable rate region $\mathcal{R}_{in}^{M,c}\left(\beta_1, ..., \beta_M\right)$ given in (72). Furthermore, exploiting time-sharing among different cost constraints, we establish the $\mathbf{\Gamma}$-achievable rate region.

APPENDIX C

PROOF OF LEMMA 1

For any fixed $(\mathbf{w}, \mathcal{S}_j(\mathbf{w}))$, we have the following enumeration:

1) $\forall\ t_{j-1} \neq 1$:

$\mathbf{x}^n\left(\mathbf{w}\left|t_{j-1}\right.\right)$ is independent of y_j^n and also $v_{j-1}^n\left(t_{j-1}\right)$ is independent of y_{j-1}^n. Thus:

a) $t_j = 1$:

$$\Pr\left(A_j\left(\mathbf{w}, t_j, t_{j-1}\right) \cap B_{j-1}\left(t_{j-1}\right)\left|B_j\left(t_j\right)\right.\right) \tag{149}$$

$$\leq \frac{1}{1-\epsilon'} 2^{-n(I(\mathbf{X}([1:M]),U;V,Y)-\epsilon)} 2^{-n(I(V;Y)-\epsilon)} \tag{150}$$

$$= \frac{1}{1-\epsilon'} 2^{-n(I(\mathbf{X}([1:M]),U;Y|V)+I(V;Y)-2\epsilon)} \tag{151}$$

$$= \frac{1}{1-\epsilon'} 2^{-n(I(\mathbf{X}([1:M]),U,V;Y)-2\epsilon)} \tag{152}$$

$$= \frac{1}{1-\epsilon'} 2^{-n(I(\mathbf{X}([1:M]),V;Y)-2\epsilon)} \tag{153}$$

where (151) holds because V is independent of $\left(\mathbf{X}\left([1:M]\right), U\right)$ while (153) follows from the Markov chain $U \leftrightarrow \left(\mathbf{X}\left([1:M]\right), V\right) \leftrightarrow Y$.

b) $t_j \neq 1$:

$$\Pr\left(A_j\left(\mathbf{w}, t_j, t_{j-1}\right) \cap B_{j-1}\left(t_{j-1}\right) | B_j\left(t_j\right)\right) \tag{154}$$

$$\leq \frac{1}{1-\epsilon'} \frac{2^{-n(I(\mathbf{X}([1:M]),U;V,Y)-\epsilon)} 2^{-n(I(V;Y)-\epsilon)}}{2^{-n(I(V;Y)+\epsilon')}} \tag{155}$$

$$= \frac{1}{1-\epsilon'} 2^{-n(I(\mathbf{X}([1:M]),V;Y)-2\epsilon-\epsilon')} \tag{156}$$

Therefore,

$$\Pr\left(A_j\left(\mathbf{w}, t_j, t_{j-1} \neq 1\right) \cap B_{j-1}\left(t_{j-1} \neq 1\right) | B_j\left(t_j\right)\right) \tag{157}$$

$$\leq \frac{1}{1-\epsilon'} 2^{-n(I(\mathbf{X}([1:M]),V;Y)-2\epsilon-\epsilon')} \tag{158}$$

$$\triangleq \Pr\left(A_j^{upper}\left(\mathbf{w}, t_{j-1} \neq 1\right)\right) \tag{159}$$

where the upper bound is independent of t_j, for arbitrary $\epsilon, \epsilon' > 0$ and sufficiently large n.

2) $t_{j-1} = 1$:

Note the fact that $\mathbf{x}^n\left(\mathcal{S}_j\left(\mathbf{w}\right)|t_{j-1}\right)$ is independent of y_j^n. Thus:

a) $t_j = 1$:

$$\Pr\left(A_j\left(\mathbf{w}, t_j, t_{j-1}\right) \cap B_{j-1}\left(t_{j-1}\right) | B_j\left(t_j\right)\right) \tag{160}$$

$$\leq \frac{1}{1-\epsilon'} 2^{-n\left(I\left(\mathbf{X}(\mathcal{S}_j);Y\middle|U,V,\mathbf{X}\left(\mathcal{S}_j^c\right)\right)-\epsilon\right)} \tag{161}$$

b) $t_j \neq 1$:

$$\Pr\left(A_j\left(\mathbf{w}, t_j, t_{j-1}\right) \cap B_{j-1}\left(t_{j-1}\right) | B_j\left(t_j\right)\right) \tag{162}$$

$$\leq \frac{1}{1-\epsilon'} \frac{2^{-n\left(I\left(\mathbf{X}(\mathcal{S}_j);Y\middle|U,V,\mathbf{X}\left(\mathcal{S}_j^c\right)\right)+I\left(V;Y\middle|\mathbf{X}\left(\mathcal{S}_j^c\right)\right)-\epsilon\right)}}{2^{-n(I(V;Y)+\epsilon')}} \tag{163}$$

$$= \frac{1}{1-\epsilon'} 2^{-n\left(I\left(\mathbf{X}(\mathcal{S}_j);Y\middle|U,V,\mathbf{X}\left(\mathcal{S}_j^c\right)\right)+I\left(V;Y\middle|\mathbf{X}\left(\mathcal{S}_j^c\right)\right)-I(V;Y)-\epsilon-\epsilon'\right)} \tag{164}$$

$$\leq \frac{1}{1-\epsilon'} 2^{-n\left(I\left(\mathbf{X}(\mathcal{S}_j);Y\middle|U,V,\mathbf{X}\left(\mathcal{S}_j^c\right)\right)-\epsilon-\epsilon'\right)} \tag{165}$$

where (165) holds since

$$I\left(V;Y\left|\mathbf{X}\left(\mathcal{S}_j^c\right)\right.\right)-I\left(V;Y\right)=H\left(V\left|Y\right.\right)-H\left(V\left|\mathbf{X}\left(\mathcal{S}_j^c\right),Y\right.\right)\geq 0.$$

Therefore,

$$\Pr\left(A_j\left(\mathbf{w},t_j,t_{j-1}=1\right)\cap B_{j-1}\left(t_{j-1}=1\right)\left|B_j\left(t_j\right)\right.\right) \tag{166}$$

$$\leq \frac{1}{1-\epsilon'} 2^{-n\left(I\left(\mathbf{X}(\mathcal{S}_j);Y\middle|U,V,\mathbf{X}\left(\mathcal{S}_j^c\right)\right)-\epsilon-\epsilon'\right)} \tag{167}$$

$$\stackrel{\Delta}{=} \Pr\left(A_j^{upper}\left(\mathbf{w},t_{j-1}=1\right)\right) \tag{168}$$

where the upper bound is independent of t_j for arbitrary $\epsilon,\epsilon'>0$ and sufficiently large n. Collecting all results from the enumeration above, we establish the lemma.

REFERENCES

[1] S. Haykin, “Cognitive radio: brain-empowered wireless communications,” *IEEE Journal on Selected Areas in Communications*, vol. 23, no. 2, pp. 201–220, Feburary 2005.

[2] N. Devroye, P. Mitran, and V. Tarokh, “Achievable rates in cognitive radio channels,” *IEEE Transactions on Information Theory*, vol. 52, no. 5, pp. 1813–1827, May 2006.

[3] S. Jafar, S. Srinivasa, I. Maric, and A. Goldsmith, “Breaking spectrum gridlock with cognitive radios: an information theoretic perspective,” *Proceedings of the IEEE*, vol. 97, no. 5, pp. 894–914, May 2009.

[4] C. E. Shannon, “The zero error capacity of a noisy channel,” *IRE Transactions on Information Theory*, vol. 2, no. 3, pp. 8–19, 1956.

[5] ——, “Channels with side information at the transmitter,” *IBM Journal of Research and Development*, vol. 2, no. 4, pp. 289–293, October 1958.

[6] S. GelFand and M. S. Pinsker, “Coding for channel with random parameters,” *Problems of Control and Information Theory*, vol. 9, no. 1, pp. 19–31, 1980.

[7] M. Costa and A. El Gamal, “The capacity region of the discrete memoryless interference channel with strong interference,” *IEEE Transactions on Information Theory*, vol. 33, no. 5, pp. 710–711, September 1987.

[8] G. Keshet, Y. Steinberg, and N. Merhav, “Channel coding in the presence of side information,” *Foundations and Trends in Communications and Information Theory*, vol. 4, no. 6, pp. 445–586, 2007.

[9] S. Sigurjonsson and Y. H. Kim, “On multiple user channels with state information at the transmitters,” in *Proceedings of IEEE International Symposium on Information Theory*, September 2005.

[10] S. Jafar, “Capacity with causal and noncausal side information: A unified view,” *IEEE Transactions on Information Theory*, vol. 52, no. 12, pp. 5468–5474, December 2006.

[11] A. Somekh-Baruch, S. Shamai, and S. Verdu, “Cooperative multiple-access encoding with states available at one transmitter,” *IEEE Transactions on Information Theory*, vol. 54, no. 10, pp. 4448–4469, October 2008.

[12] S. P. Kotagiri and J. N. Laneman, “Multiaccess channels with state known to some encoders and independent messages,” *EURASIP Journal on Wireless Communications and Networking*, vol. 2008, pp. 1–14, January 2008.

[13] T. Philosof, A. Khisti, U. Erez, and R. Zamir, “Lattice strategies for the dirty multiple access channel,” in *Proceedings of IEEE International Symposium on Information Theory*, June 2007.

[14] T. Philosof and R. Zamir, “The rate loss of single-letter characterization: the ”Dirty” multiple access channel,” 2008, available online at http://arxiv.org/abs/0803.1120.

[15] A. Lapidoth and Y. Steinberg, “The multiple access channel with causal and strictly causal side information at the encoders,” in *Proceedings of International Zurich Seminar on Communications*, March 2010.

[16] ——, “The multiple access channel with two independent states each known causally to one encoder,” in *Proceedings of IEEE International Symposium on Information Theory*, June 2010.

[17] S. H. Lim, Y. H. Kim, A. El Gamal, and S. Y. Chung, “Noisy network coding,” 2010, available online at http://arxiv.org/abs/1002.3188v2.

[18] L. Ozarow, “The capacity of the white Gaussian multiple access channel with feedback,” *IEEE Transactions on Information Theory*, vol. 30, no. 4, pp. 623–629, July 1984.

[19] H. Permuter, S. Shamai, and A. Somekh-Baruch, “Message and state cooperation in multiple access channels,” 2010, available online at http://arxiv.org/abs/1006.2022.

[20] S. Verdu, “On channel capacity per unit cost,” *IEEE Transactions on Information Theory*, vol. 36, no. 5, pp. 1019–1030, September 2002.

[21] M. Gastpar, “The Wyner-Ziv problem with multiple sources,” *IEEE Transactions on Information Theory*, vol. 50, no. 11, pp. 2762–2768, November 2004.

[22] A. El Gamal and Y. H. Kim, “Lecture notes on network information theory,” 2010, available online at http://arxiv.org/abs/1001.3404.

[23] T. M. Cover and J. A. Thomas, *Elements of Information Theory*. Wiley-Interscience, July 2006.

[24] J. M. Ooi and G. W. Wornell, “Fast iterative coding techniques for feedback channels,” *IEEE Transactions on Information Theory*, vol. 44, no. 7, pp. 2960–2976, November 1998.

[25] D. Slepian and J. K. Wolf, “A coding theorem for multiple access channels with correlated sources,” *The Bell System Technical Journal*, vol. 52, no. 7, pp. 1037–1076, 1973.

[26] T. M. Cover and C. Leung, “An achievable rate region for the multiple-access channel with feedback,” *IEEE Transactions on Information Theory*, vol. 27, no. 3, pp. 292–298, May 1981.

[27] F. Willems, “The feedback capacity region of a class of discrete memoryless multiple access channels,” *IEEE Transactions on Information Theory*, vol. 28, no. 1, pp. 93–95, January 1982.

[28] J. Schalkwijk and T. Kailath, “A coding scheme for additive noise channels with feedback–I: No bandwidth constraint,” *IEEE Transactions on Information Theory*, vol. 12, no. 2, pp. 172 – 182, April 1966.

[29] K. De Bruyn, V. V. Prelov, and E. C. van der Meulen, “Reliable transmission of two correlated sources over an asymmetric multiple-access channel,” *IEEE Transactions on Information Theory*, vol. 33, no. 5, pp. 716–718, September 1987.